

## DIN 41612 Series



### KLS1-D2Q 2x10Pin Two row Short B Type

**Electrical:**

Contact Resistance: 30 mΩ Max. Insulator  
Insulation Resistance: 1000 MΩ Min. at 500 VDC  
Withstand Voltage: 1000 VAC for 1 minute  
Current Rating: 2 AMP  
Voltage Rating: 250 VAC  
Operating Temperature: -55°C~+105°C

**Material:**

Insulator: Glass-filled thermoplastic PBT UL94V-0  
Contacts: Male-Brass / Female-Phosphor Bronze  
Plating: full gold or selected gold in mating area.

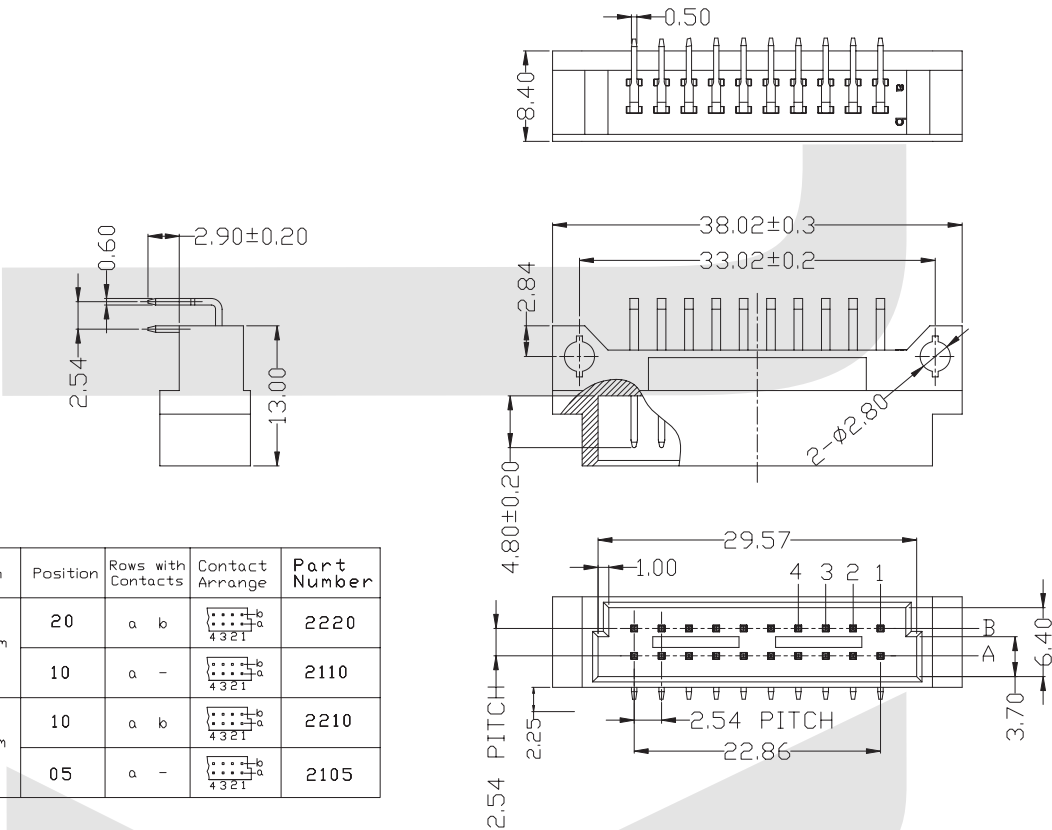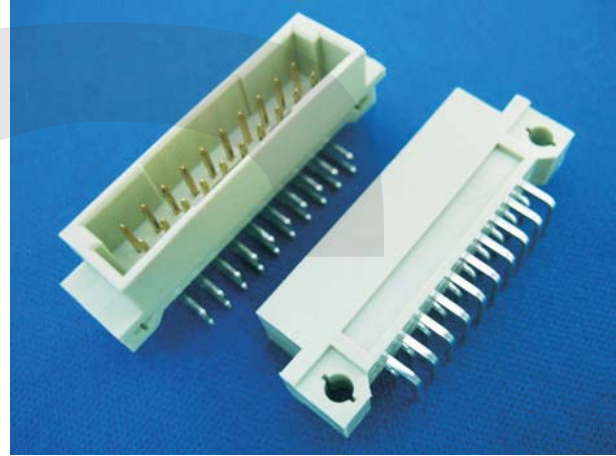

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	20	a b		2220
	10	a -		2110
5.08mm	10	a b		2210
	05	a -		2105

## ORDER INFORMATION

Product No.: KLS1-D2Q-2220-MR

Pos. No. \_\_\_\_\_ Tail Style: S-4.0mm Straight pin  
 Din41612 2x10Pin Two row Short Type \_\_\_\_\_ W1-13mm Straight pin  
 Part Number: 2220 / 2110 / 2210 / 2105 \_\_\_\_\_ R-Right pin  
 Contact Type: M=Male F=Female

## DIN 41612 Series






### KLS1-D2Q 2x10Pin Two row Short B Type

**Electrical:**

Contact Resistance: 30 mΩ Max. Insulator  
 Insulation Resistance: 1000 MΩ Min. at 500 VDC  
 Withstand Voltage: 1000 VAC for 1 minute  
 Current Rating: 2 AMP  
 Voltage Rating: 250 VAC  
 Operating Temperature: -55°C~+105°C

**Material:**

Insulator: Glass-filled thermoplastic PBT UL94V-0  
 Contacts: Male-Brass / Female-Phosphor Bronze  
 Plating: full gold or selected gold in mating area.

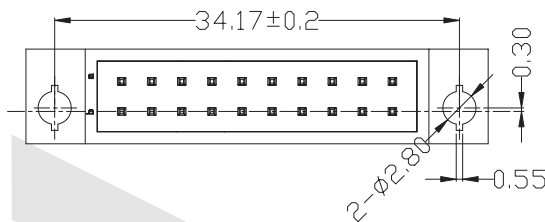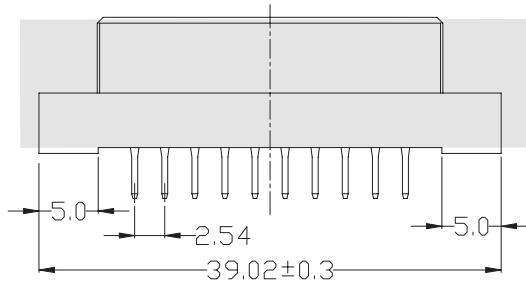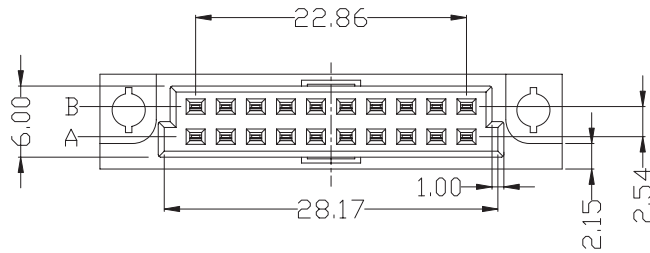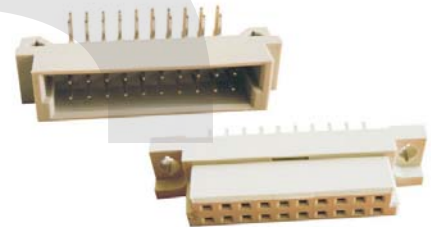

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	20	a b		2220
	10	a -		2110
5.08mm	10	a b		2210
	05	a -		2105

## ORDER INFORMATION

Product No.: **KLS1-D2Q-2220-F S**

Pos. No. \_\_\_\_\_ Tail Style: S-4.0mm Straight pin  
 Din41612 2x10Pin Two row Short Type W1-13mm Straight pin  
 R-Right pin  
 Part Number: 2220 / 2110 / 2210 / 2105 Contact Type: M=Male F=Female



## DIN 41612 Series






### KLS1-D2Q 2x10Pin Two row Short B Type

**Electrical:**

Contact Resistance: 30 mΩ Max. Insulator  
 Insulation Resistance: 1000 MΩ Min. at 500 VDC  
 Withstand Voltage: 1000 VAC for 1 minute  
 Current Rating: 2 AMP  
 Voltage Rating: 250 VAC  
 Operating Temperature: -55°C~+105°C

**Material:**

Insulator: Glass-filled thermoplastic PBT UL94V-0  
 Contacts: Male-Brass / Female-Phosphor Bronze  
 Plating: full gold or selected gold in mating area.

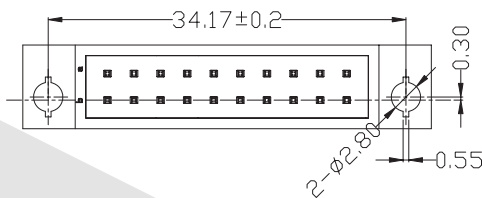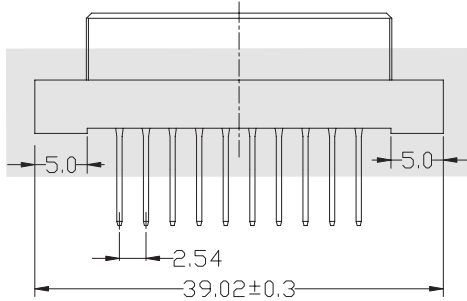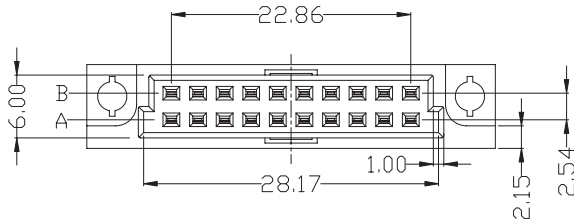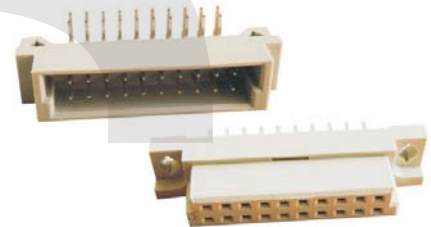

Pitch	Position	Rows with Contacts	Contact Arrange	Part Number
2.54mm	20	a b		2220
	10	a -		2110
5.08mm	10	a b		2210
	05	a -		2105

## ORDER INFORMATION

Product No.: **KLS1-D2Q-2220-F W1**

Pos. No. \_\_\_\_\_ Tail Style: S-4.0mm Straight pin  
 Din41612 2x10Pin Two row Short Type W1-13mm Straight pin  
 Part Number: 2220 / 2110 / 2210 / 2105 R-Right pin  
 Contact Type: M=Male F=Female