

**Modular Plugs Series**

**KLS12-RJ11B-4P4C**

**ELECTRICAL :**


CURRENT RATING:1.5AMPS  
VOLTAGE RATING:125VAC  
WITHSTANDING VOLTAGE:AC1000V RMS 50Hz or 60Hz 1Min  
INSULATION RESISTANCE:100MEGOHMS MIN  
CONTACT RESISTANCE:39MILLMHOS MAX

**MECHANICAL**

CABLE TO PLUG TENSILE STRENGTH:7.7Kg MINI  
DURABILITY:750MATING CYCLES MINI

**MATERIAL**

HOUSING: POLYCARBONATE (PC)UL 94V-0 OR UL 94V-2  
CONTACT: PHOSPHOR BRONZE, HARD GOLD PLATED OVER NICKEL  
SHIELDING:0.25mm THICKNESS COPPER ALLOY WITH TIN PLATED  
GOLD PLATING:3u INCH,6u INCH, 15u INCH,30u INCH,50u INCH  
WORKING TEMPERATURE : -40°C ~80°C

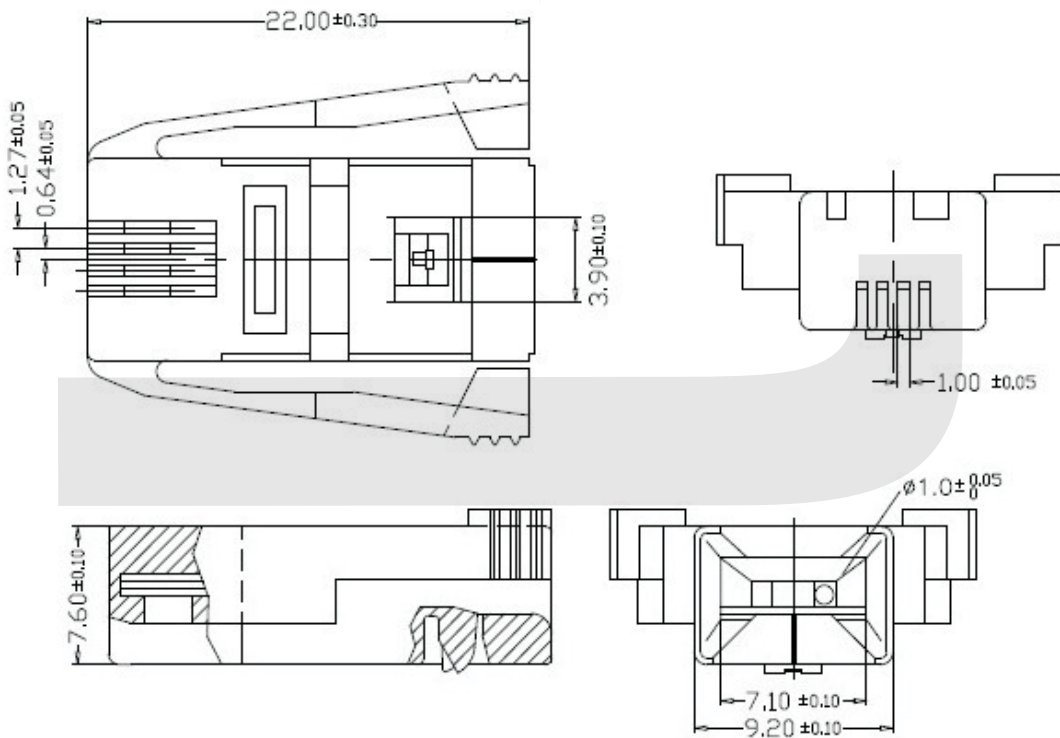

**ORDER INFORMATION**

**KLS12-RJ11B - 4P4C XX - X X**

Part Number

Point NO.	Gold Thickness	Gold style	Color
4P4C Point	01-Fu"	E = 2 forks	Transparent
4P2C Point	02-3u"	Z = 3 forks	or other
	03-6u"		
	04-15u"		
	05-30u"		
	06-50u"		