

Modular Plugs Series

KLS12-RJ46B-10P10C

ELECTRICAL :

1. VOLTAGE RATING: 125 VAC RMS.
2. CURRENT RATING : 1.5 AMP
3. CONTACT RESISTANCE : 30 MILLIOHMS MAX.
4. INSULATION RESISTANCE : 500 MEGOHMS MIN @500 VDC
5. DIELECTRIC WITHSTANDING RESISTANCE : 1000 VAC RMS. 50Hz 1 MINUTE

MECHANICAL


1. DURABILITY : 750 CYCLES MIN
2. PCB RETENTION PRE-SOLDER : 1 LB MIN

MATERIAL

1. HOUSING MATERIAL : GLASS FILLED PLYESTER
UL94V-0ABS, PBT, NYLON
2. HOUSING COLOR : BLACK, GRAY, IVORY, WHITE OR OTHERS
3. CONTACT MATERIAL : PHOSPHOR BRONZE φ0.46mm
4. PLATING : GOLD PLATING OVER NICKEL.GOLD PLATING THICKNESS 1.5u"/3u"/6u"/15u"/30u"/50u"
5. SHIELD : 0.23 THICKNESS BRASS WITH NICKEL PLATED

ENVIRONMENTAL

1. STORAGE :-40°C~80°C

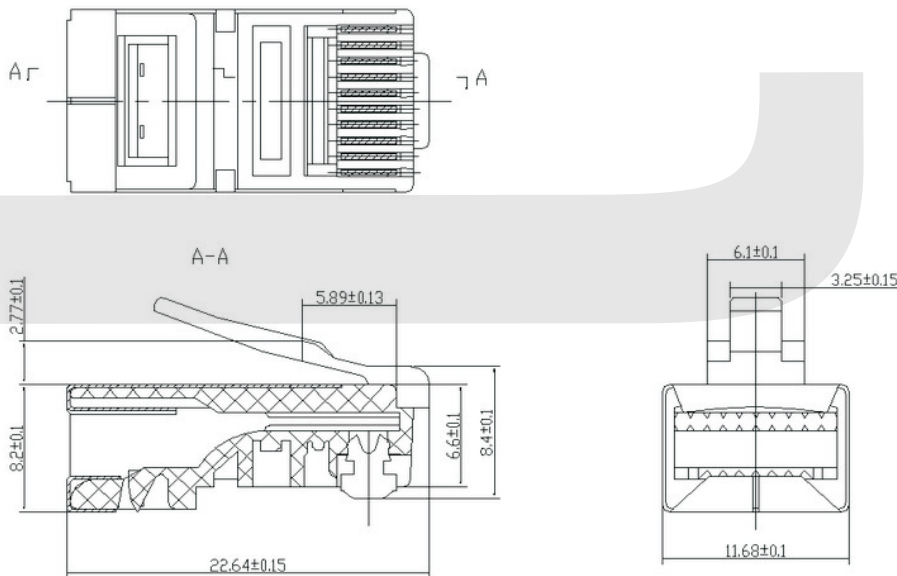

ORDER INFORMATION

KLS12-RJ46B- 10P10C XX - X X X X

Part Number

Point NO.	Gold Thickness	Blade style	Color	Shielded	Shell
10P10C Point 10P8C Point 10P6C Point 10P4C Point	01-Fu" 02-3u" 03-6u" 04-15u" 05-30u" 06-50u	1=A Type 2=B Type 3=C Type 4=D Type 5=E Type	Transparent or other	0=No shielded 1=Withshielded	1=Steel 2=Copper shell