


Terminals Series

KLS8-0605 Double wings screw on wire connectors Series

Material: UL Nylon 66, with spring inside.

Usage: peel wire coat, insert the wire in, then tighten.

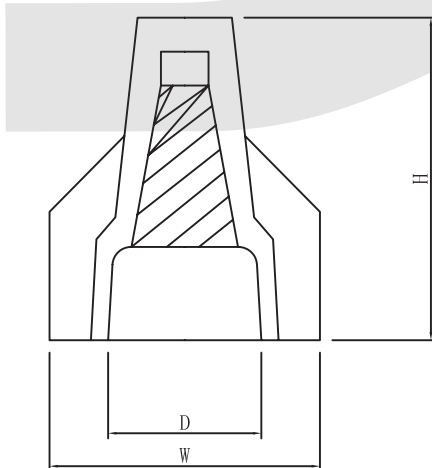

| ITEM. NO. | H (mm) | W (mm) | D (mm) | SUITABLE WIRES | COLOR |
|-----------|--------|--------|--------|----------------|--------|
| SW-P1 | 22 | 19 | 12.5 | MIN#18 2 | Yellow |
| | | | | MAX#12 3 | |
| SW-P2 | 28 | 22 | 15 | MIN#14 2 | Red |
| | | | | MAX#10 4 | |

ORDER INFORMATION

KLS8- 0605 - SW - P1

