

Switch

Slide Switch Series

KLS7-SS62-24H03 (2P4T) Slide Switch Series


SPECIFICATIONS

- Rating: 0.5A 50VDC
- Contact Resistance: 30mΩ Max
- Insulation Resistance: 500VDC 100MΩ Min
- Dielectric Strength: 500V AC 1 Minute
- Operating Force: 100gf~800gf
- Electrical Life : 10,000 cycles



VII

L=4 - 12

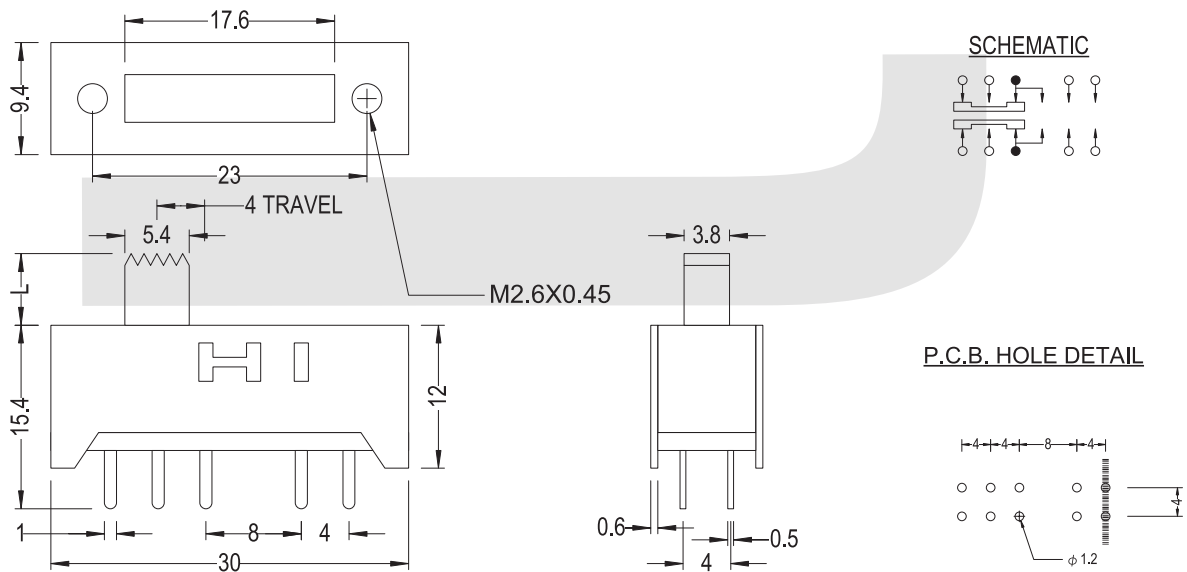

ORDER INFORMATION

KLS7-SS62 - 2 4 H 03 - X X - X

Part Number: KLS7-SS62

Slide Switch Type: 2

Pole: 4

Throw: H

Operating Force: 03

Knobe Height: X

Sequential No.: X

Travelling					
C	D	E	F	G	H
1.5	2.0	2.5	3.0	3.5	4.0
I	J	K	L	N	P
4.5	5.0	5.5	6.0	7.0	8.0

Knob Type

RG G TG VG EG CG