


TYPE	A	B
LED B/L	12.5	7.9

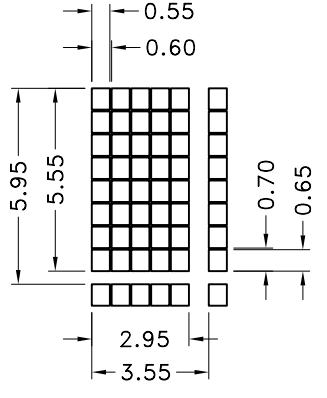

SCALE: 4:1

PIN	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16
NAME	VSS	VDD	VO	RS	R/W	E	DB0	DB1	DB2	DB3	DB4	DB5	DB6	DB7	LED+	LED-

SPECIFICATIONS	
1.	DISPLAY TYPE: STN/TRANSMISSIVE/NEGATIVE/BLUE
2.	LCD DRIVING VOLTAGE: 4.7V
3.	LOGIC VOLTAGE: 5.0V
4.	VIEWING DIRECTION: 6 O'CLOCK
5.	OPERATING TEMP: -1 0° C~60° C
6.	STORAGE TEMP: -2 0° C~70° C
7.	DRIVE MODE: 1/16 DUTY,1/5 BIAS
8.	BACKLIGHT: WHITE/SIDE BACKLIGHT/5.0V
9.	OTHER:
MECHANICAL TOL.±0.2 UNLESS SPECIFIED	

NOTE:

DESCRIPTION:		C/D	
SCALE: FIT			
SHEET: 1 OF 1			
PROJECTION	MODEL	SERIAL NUMBER	
UNIT: mm	TC1602B-08	LXL0797	
APP:	CHK:	DWN:	
CATE:	DATE:	DATE:	