

## Stereo Jack Series


### KLS1-TPJ2.5-003 (SMD Stereo Jack)

#### Technical parameters:

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

#### Material:

Terminal 1 : Copper Alloy  
 Terminal 2 : Copper Alloy  
 Terminal 3 : Copper Alloy  
 Terminal 10 : Barss  
 Terminal 11 : Barss  
 Housing : PA6T  
 Cover : PA6T

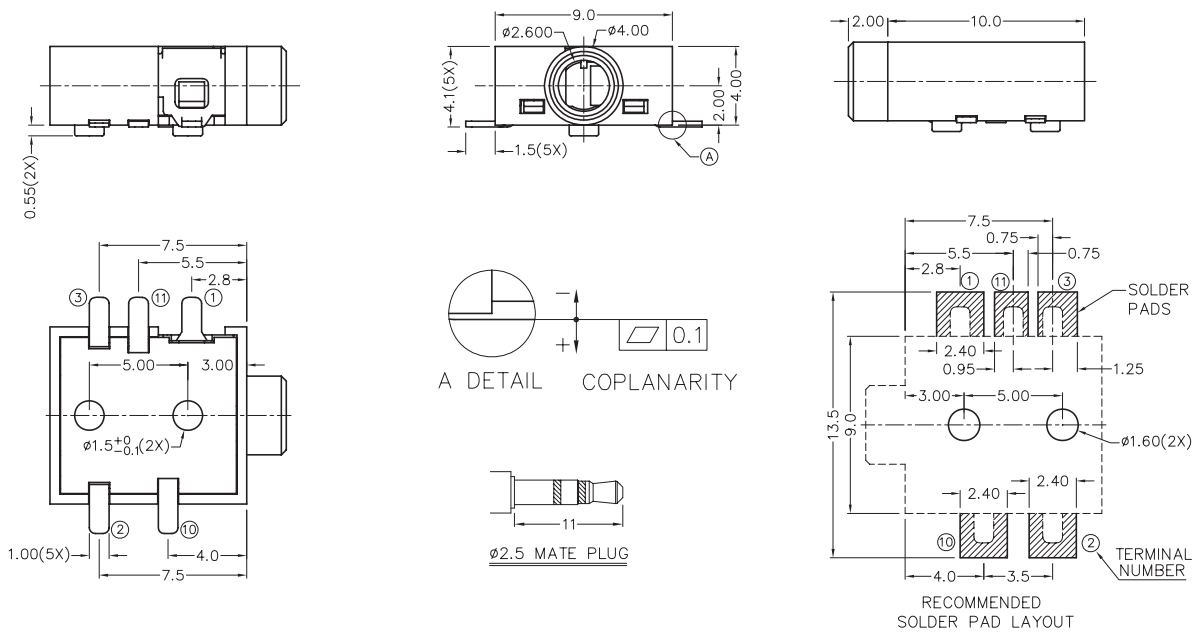

MODEL NO.	TPJ2.5-003	TPJ2.5-003A	TPJ2.5-003B	TPJ2.5-003C	TPJ2.5-003D	TPJ2.5-003E
SCHEMATIC						

## ORDER INFORMATION

Product NO.: KLS1-TPJ2.5-003 A

