

Stereo Jack Series



KLS1-SSJ2.5-003 (Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Housing/Cover :Pa66
 Terminal 1 : Copper Alloy
 Terminal 2 : Copper Alloy
 Terminal 3 : Copper Alloy
 Terminal 4 : Copper Alloy
 Terminal10 :Brass
 Terminal11 : Brass

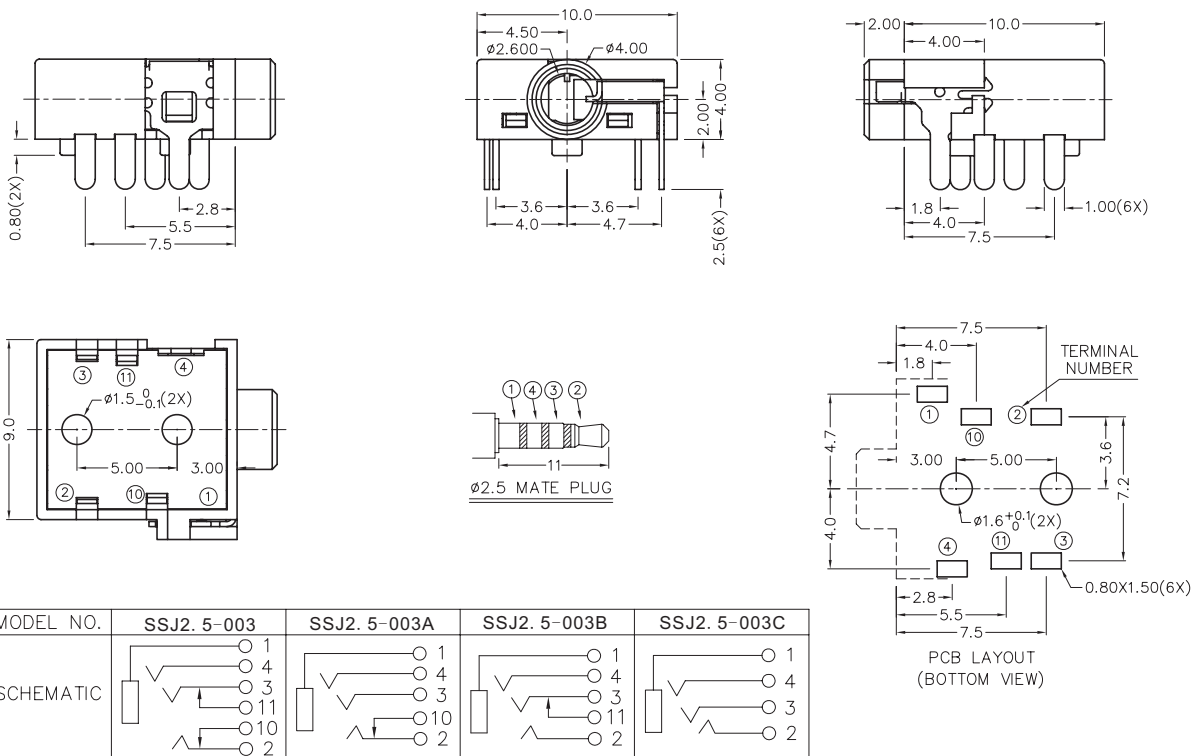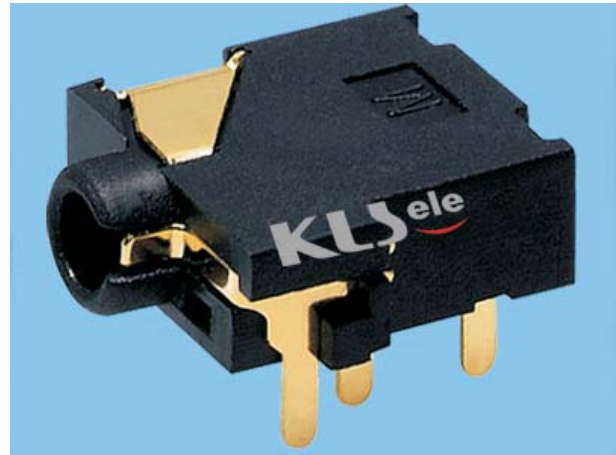

MODEL NO.	SSJ2. 5-003	SSJ2. 5-003A	SSJ2. 5-003B	SSJ2. 5-003C
SCHEMATIC				

ORDER INFORMATION

Product NO.: **KLS1-SSJ2.5 -003A**

Schmatic: See Annex

Pos. NO.

2.5mm Dip Stereo Jack Type