

## Stereo Jack Series


### KLS1-SSJ2.5-002 (Dip Stereo Jack)

**Technical parameters:**

- Rated voltage: DC30(V)
- Rated current: 0.5 (A)
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 (N)
- Life: 50000 times
- Operating Temperature: -30 °C ~ 70 °C

**Material:**

- Terminal 1 : Copper Alloy
- Terminal 2 : Copper Alloy
- Terminal 3 : Copper Alloy
- Terminal 4 : Copper Alloy
- Terminal10 : Brass
- Terminal11 : Brass
- Housing : Pa66

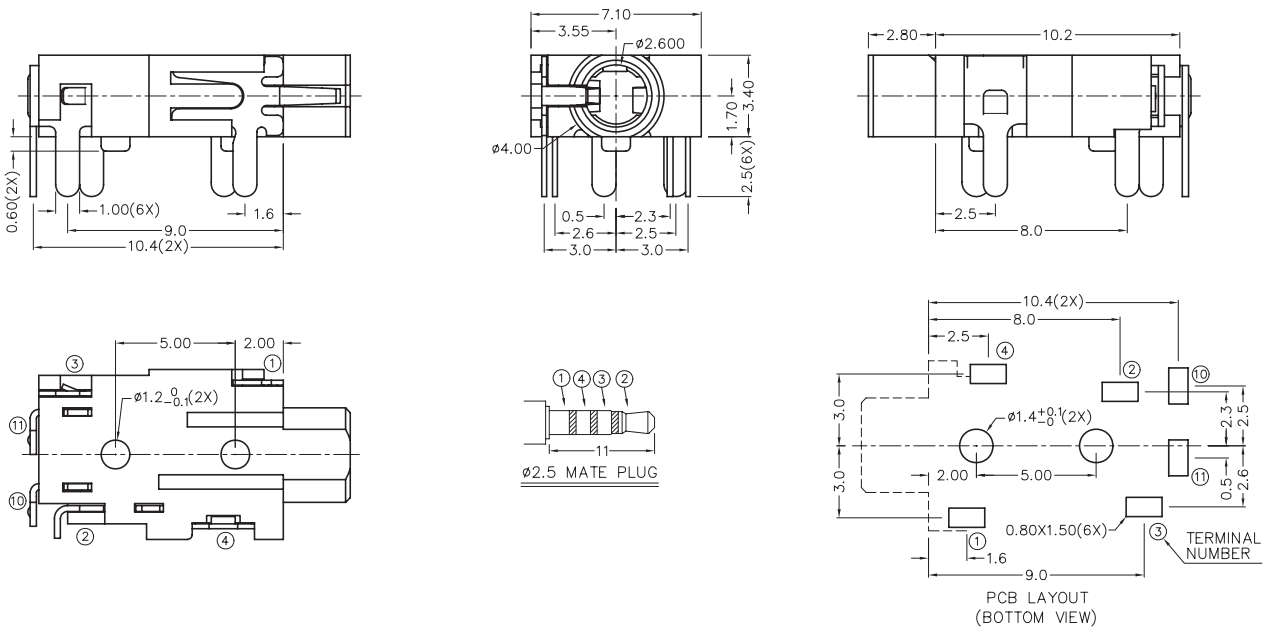

MODEL NO.	SSJ2. 5-002	SSJ2. 5-002A	SSJ2. 5-002B	SSJ2. 5-002C	SSJ2. 5-002D
SCHEMATIC					

## ORDER INFORMATION

Product NO.: **KLS1-SSJ2.5 -002A**

Pos. NO. \_\_\_\_\_ Schmatic: See Annex  
2.5mm Dip Stereo Jack Type