

Stereo Jack Series



KLS1-TSJ2.5-001(Dip Stereo Jack)

Technical parameters:

Rated voltage: DC 30 V
 Rated current: 0.5 A
 Contact resistance: 0.03Ω, max
 Insulation resistance: 100MΩ, min
 Pressure: AC500V (50Hz) / 1minute
 Insertion Force :2-20 N
 Life: 50000 times
 Operating Temperature:-30°C ~ 70°C

Material:

Center Pin Material:
 Terminal 1 :COPPER ALLOY
 Terminal 2 :COPPER ALLOY
 Terminal 3 :COPPER ALLOY
 Terminal10:BRASS
 Housing :Pa66

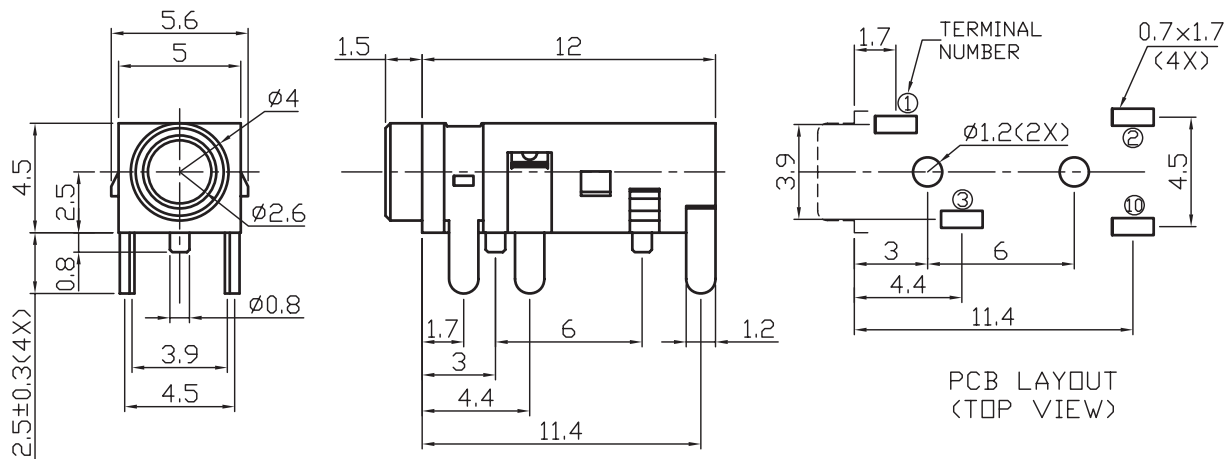

MCDEL. NO.	001B	001A	001
SCHEMATIC			

ORDER INFORMATION

Product NO.: KLS1-TSJ2.5 -001A

