



## Stereo Jack Series



KLS1-TSJ3.5-008CB (Dip Stereo Jack)

### Technical parameters:

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

### Material:

Housing , Cover : PBT  
 Center Pin Material:  
 Spring : Stainless Steel  
 Terminal 1,2,3,10,11 : Brass  
 Bushing : Brass

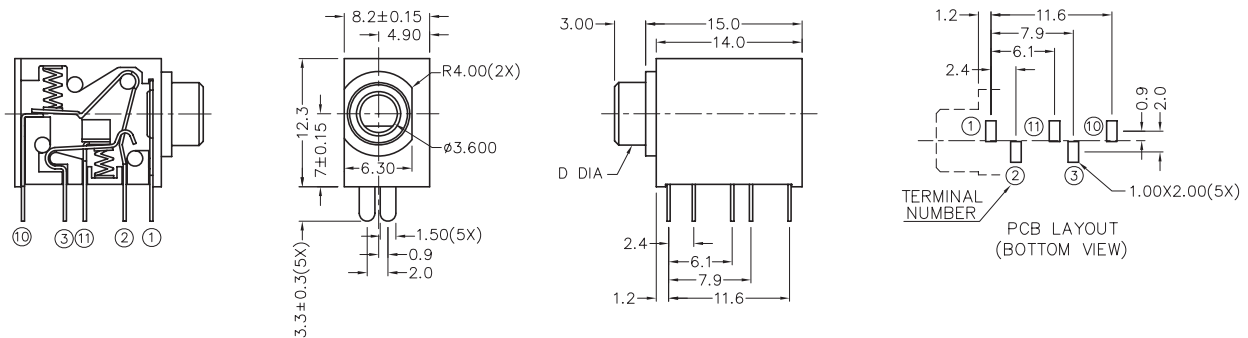

Without NUT	ø6.0	MODEL NO.	TSJ3.5-008CB	TSJ3.5-008CBA	TSJ3.5-008CBB	TSJ3.5-008CBC	TSJ3.5-008CBD
D DIA		SCHEMATIC					

## ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-008CBA

