

## Stereo Jack Series


### KLS1-SPJ3.5-006 (SMD Stereo Jack)

**Technical parameters:**

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance: 0.03Ω, max  
 Insulation resistance: 100MΩ, min  
 Pressure: AC500V (50Hz) / 1minute  
 Insertion Force :2-20 N  
 Life: 50000 times  
 Operating Temperature:-30°C ~ 70°C

**Material:**

Terminal 1: Copper Alloy  
 Terminal 2: Copper Alloy  
 Terminal 3: Copper Alloy  
 Terminal 4: Copper Alloy  
 Terminal 5: Copper Alloy  
 Terminal 6: Copper Alloy  
 Housing : PA6T  
 Tape : Polyimide

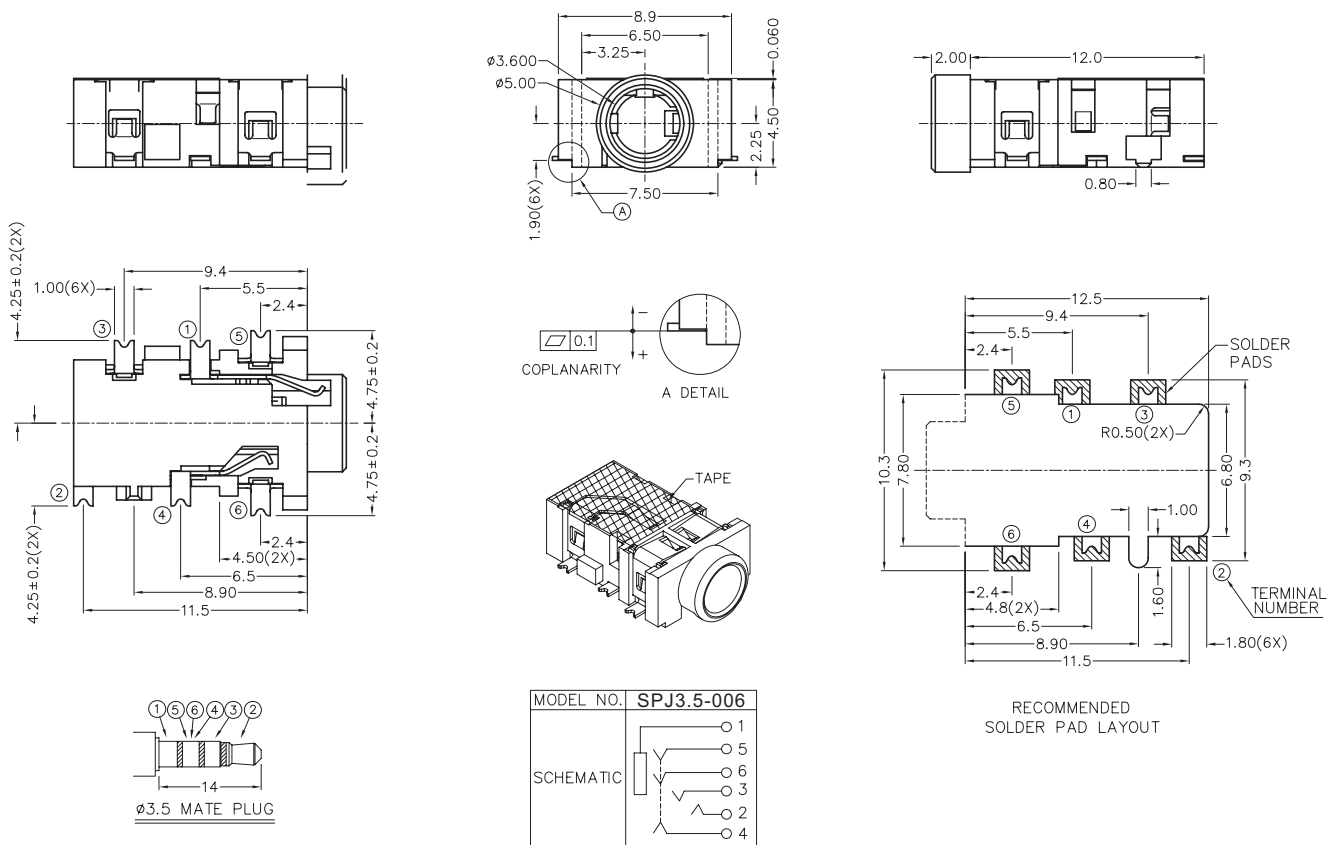

## ORDER INFORMATION

Product NO.: KLS1-SPJ3.5-006

