



Stereo Jack Series







KLS1-TSJ3.5-010A (Dip Stereo Jack)

Technical parameters:

- Rated voltage: DC 30 V
- Rated current: 0.5 A
- Contact resistance: 0.03Ω, max
- Insulation resistance: 100MΩ, min
- Pressure: AC500V (50Hz) / 1minute
- Insertion Force :2-20 N
- Life: 50000 times
- Operating Temperature:-30°C ~ 70°C

Material:

- Housing-A/B,Cover : PBT
- Terminal 1 : Cold Rolled Steel
- Terminal 2,3 : Copper Alloy
- Spring 1 : Stainless Steel
- Spring 2 : Copper Alloy
- Bushing : Brass
- Insulator : Pa66
- Contact Clip : C521OR-EH AG CLAD
- Terminal 4,5,6,7,8,9,10,11 : Brass

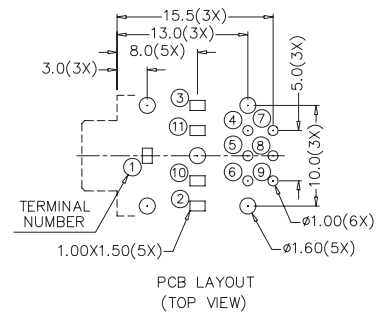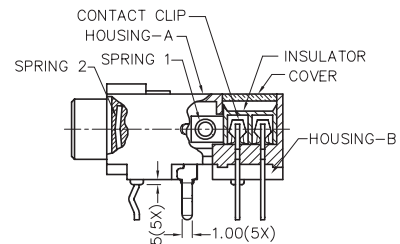

With NUT	M6X0.5	MODEL NO.	TSJ3.5-010A	TSJ3.5-010AA	TSJ3.5-010AB	TSJ3.5-010AC	TSJ3.5-010AD
		D DIA					
		SCHEMATIC					

ORDER INFORMATION

Product NO.: KLS1-TSJ3.5-010AA

