

RCA JACK Series


KLS1-RCA-202 Metal R/A PCB Mount Dual RCA Jack

Electrical Specification:

Contact resistance : 30mΩ Max
 Insulation resistance : 50MΩ Min at DC 500V
 Withstand voltage : AC 500V(50Hz) 1min
 Operating Temperature : -25°C~+85°C

Materials:

Plastic : PBT UL94V~0
 Sealed Plate : Brass
 Terminal : Brass
 Outer Contact : Brass
 Washer : PBT UL94V~0
 Cover : ABS UL94V~0
 Housing : PBT UL94V~0

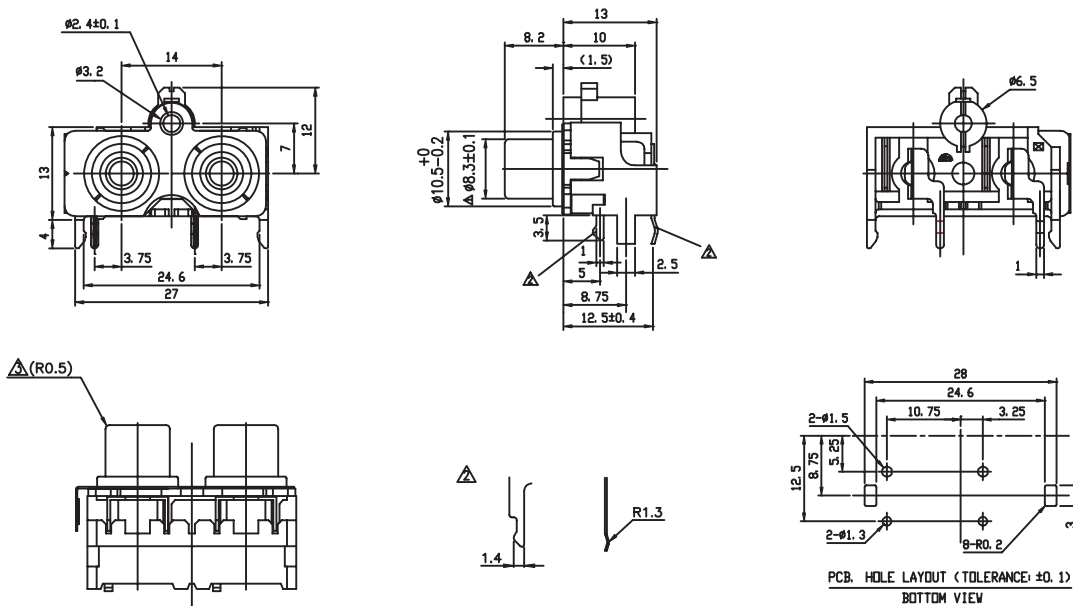

ORDER INFORMATION

Product NO.: KLS1-RCA-202-N-BK-BK

Pos. NO. _____
 RCA Jack Type _____
 G:Nickel Plated _____
 Color: BK-BK : Black-Black
 RE-WH : Red-White
 WH-RE : White-Red
 RE-YE : Red-Yellow