



XLR CONNECTOR SERIES



KLS1-XLR-S01 (XLR Socket)

Electrical Specification:

Contact resistance: $\leq 0.03\Omega$
 Insulation resistance: $\geq 100m\Omega$
 Withstand voltage: 500V AC (50Hz)/minute
 Rated load: 50V DC, 1A
 Insertion and extraction force: 4-40N
 Temperature range: $-30^{\circ}C$ to $+80^{\circ}C$




MODELS	L
XLR3-011MH	L=2.6
XLR3-011MH-01	L=0

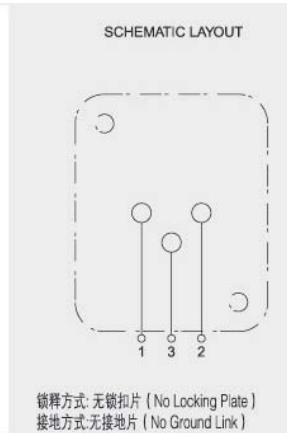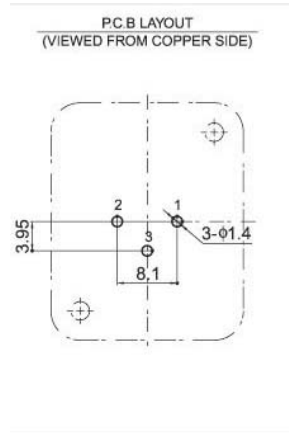

ORDER INFORMATION

Product NO.:KLS1-XLR-S01-03-M-S-L2.6




XLR CONNECTOR SERIES

KLS1-XLR-S01 (XLR Socket)

Electrical Specification:

- Contact resistance: $\leq 0.03\Omega$
- Insulation resistance: $\geq 100m\Omega$
- Withstand voltage: 500V AC (50Hz)/minute
- Rated load: 50V DC, 1A
- Insertion and extraction force: 4-40N
- Temperature range: $-30^{\circ}C$ to $+80^{\circ}C$

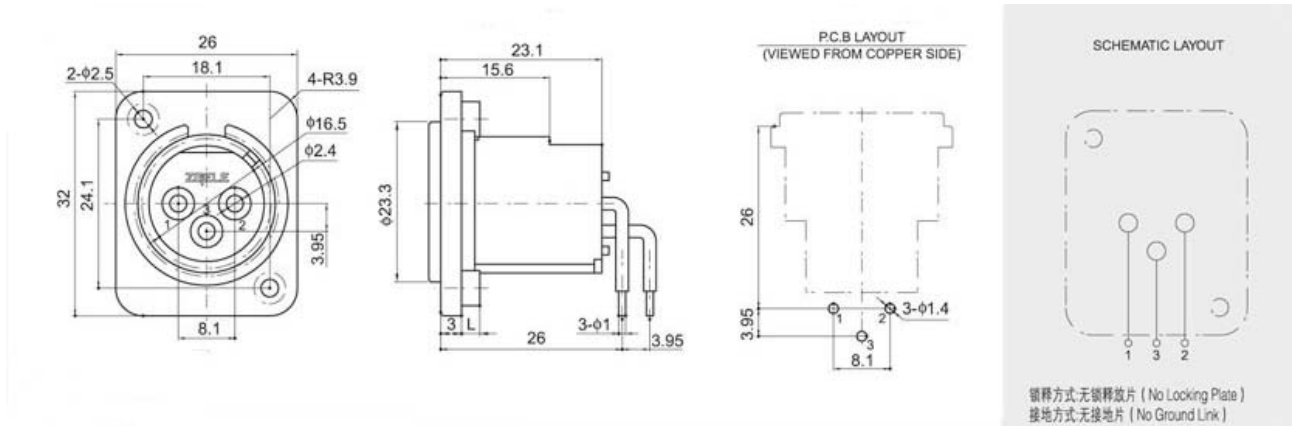

ORDER INFORMATION

Product NO.:KLS1-XLR-S01-03-M-R-L2.6

