



Switch

Toggle Switch Series

KLS7-MS-102-C4 Miniature Toggle Switch Series


SPECIFICATIONS

- Rating: 5A 125VAC; 2A 250VAC
- Contact Resistance: 20MΩ max
- Insulation Resistance: 500V DC 1000MΩ Min
- Dielectric Strength: 1500V AC 1 Minute
- Operating Temperature: -55°C~+85°C
- Electrical Life :20,000 cycles

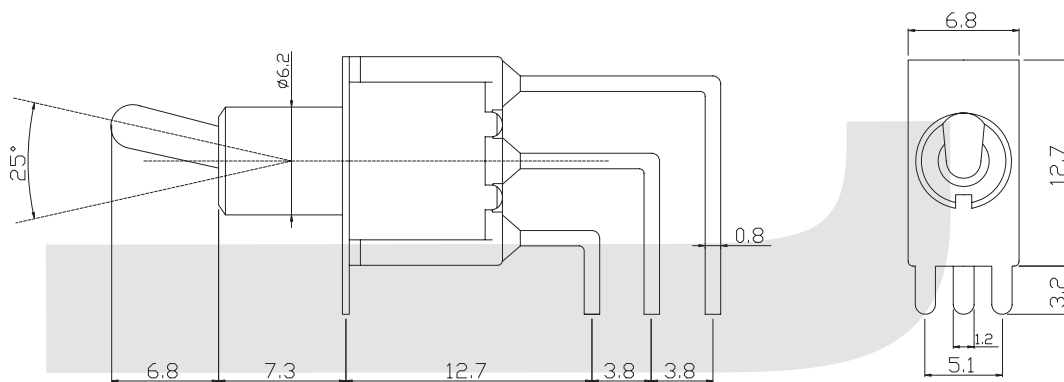

PCB LAYOUT

ORDER INFORMATION

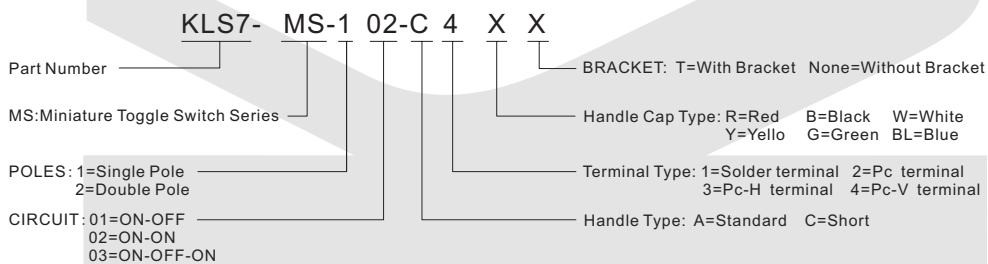



Switch

Toggle Switch Series

KLS7-MS-202-C4 Miniature Toggle Switch Series

SPECIFICATIONS

- Rating: 5A 125VAC; 2A 250VAC
- Contact Resistance: 20MΩ max
- Insulation Resistance: 500V DC 1000MΩ Min
- Dielectric Strength: 1500V AC 1 Minute
- Operating Temperature: -55°C~+85°C
- Electrical Life :20,000 cycles

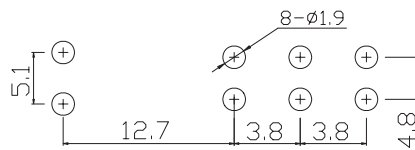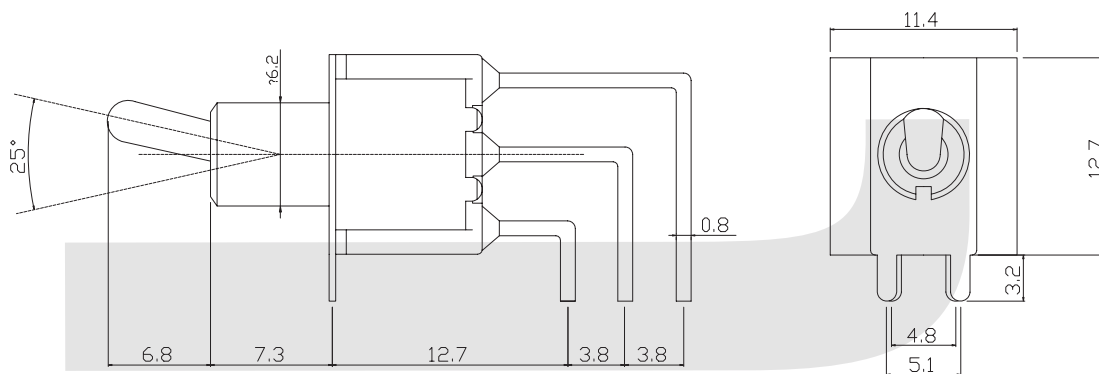

ORDER INFORMATION

