KLS electronic
www.cnkls.com

I

MINI DIN JACK Series

KLS1-155A MINI DIN Jack Right Angle Double Type

MATERIAL
Insulator: PBT+Glass Fiber, UL94v-0
Contact: Phosphor Bronze
Shell: Spcc, Tin plated

Specification
Current rating: 1 A Max.
Dielectric withstanding voltage: 750 V (AC) for 1 min.
Contact resistance: 30 mΩ Max.
Insulation resistance: 1000 MΩ Min.
Temperature range:-40°C ~ + 105°C

Finishes
contacts: Gold flashed 1u ", 3u", 5u ", 10u", 15u ", 30u".
Shell: Nickel, tin or gold plated

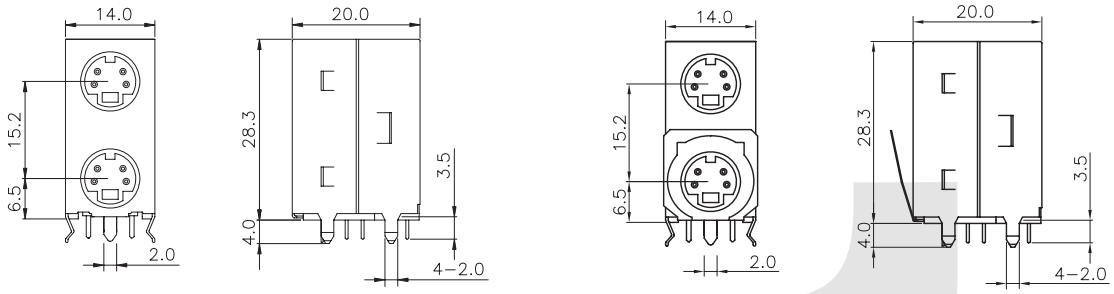

Without shrapnel

With shrapnel

ARRANGEMENT OF CONTACT			
POS. NO.	4PIN/4PIN	6PIN/6PIN	8PIN/8PIN
P.C.B. LAYOUT (BOTTOM VIEW)			

ORDER INFORMATION

Product NO.: KLS1 - 155A - 44 G/P - 0

Pos. NO.
MINI DIN Jack Right Angle Double Type
Pin Number: 44=4/4P 64=6/4P 84=8/4P
46=4/6P 66=6/6P 86=8/6P
48=4/8P 68=6/8P 88=8/8P
Color: G/P=Green+Purple
G/B=Green+Black B/B=Black+Black

Shrapnel
0: Without shrapnel
1: With shrapnel