Stereo Jack Series

KLS1-TG6.3-007A (Stereo Jack Series)

Technical parameters:

Rated voltage: DC 30 V
Rated current: 0.5 A
Contact resistance: 0.03Ω, max
Insulation resistance: 100MΩ, min
Pressure: AC500V (50Hz) / 1minute
Insertion Force :2-20 N
Life: 50000 times
Operating Temperature:-30°C ~ 70°C

Material:

Housing: PC
Contact foot: Bronze

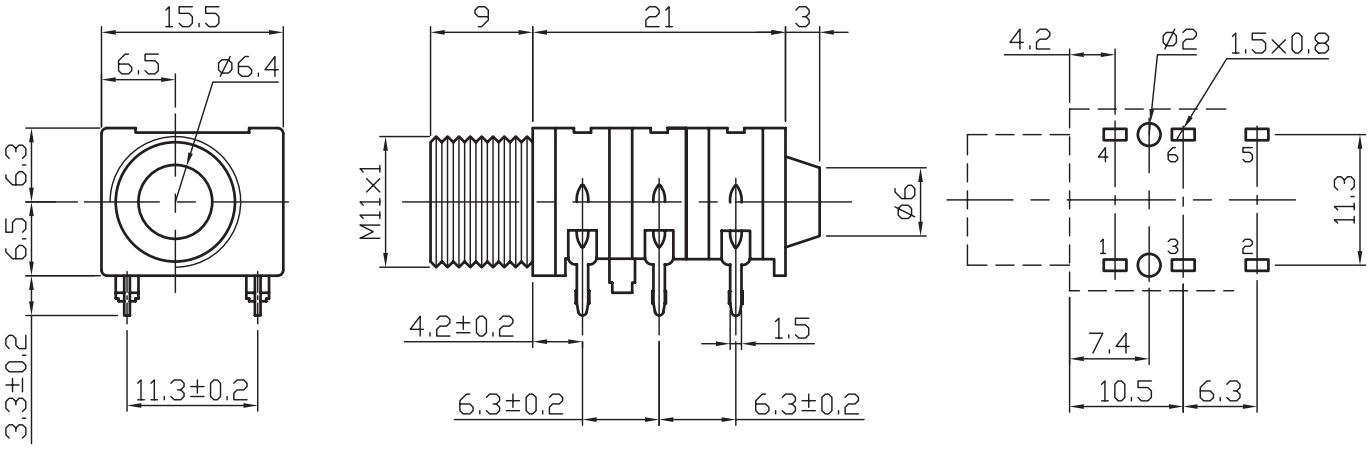

TG6.3-007A	TG6.3-007AA	TG6.3-007AB	TG6.3-007AC	TG6.3-007AD	TG6.3-007AE
					

ORDER INFORMATION

Product NO.: KLS1-TG6.3-007AA

Pos. NO.

6.3mm Stereo Jack Series

Schematic: See Annex