


Rotary switches* Coding switches


KLS7-RS21600 Terminal 3x2 type, 16 Position, BCD Circuit

ELECTRICAL:

Switching Rating: 25mA 24V DC
 Non-Switching Rating: 100mA 50 VDC
 Dielectric Strength: AC 250 V 1 Minute
 Contact Resistance: 100mΩ Max.
 Insulation Resistance: 1000 mΩ Mim.at 100 VDC
 Operation Force: 500gf-cm Max.
 Operating Temperature: -25°C ~ +80°C
 Electrical Life: 20,000 Cycles
 Vibration: 10Hz-50Hz-10Hz for 6Hrs.

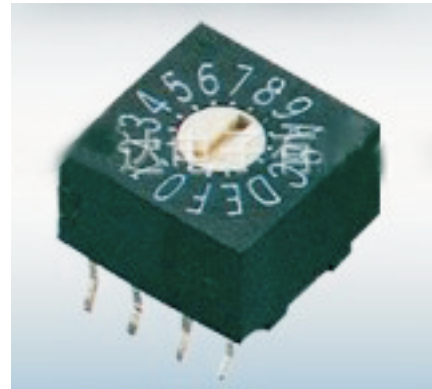

(1) Terminal 3x2 type

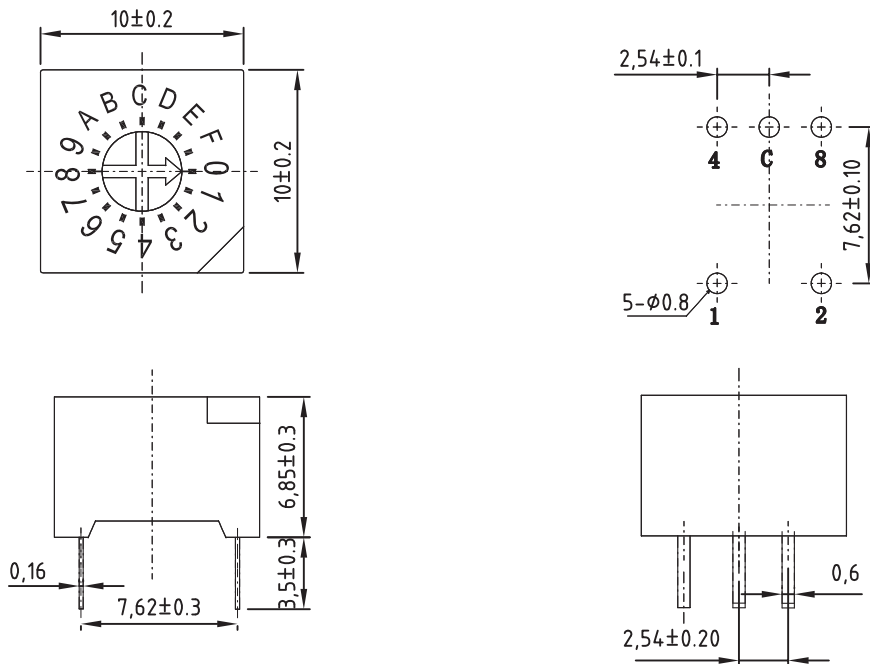

(2) Output Codes

PIN NO	POSITION															
	0	1	2	3	4	5	6	7	8	9	A	B	C	D	E	F
1		●		●		●		●		●		●		●		●
2			●	●			●	●			●	●			●	●
4					●	●	●	●					●	●	●	●
8									●	●	●	●	●	●	●	●

ORDER INFORMATION

KLS7-RS21600-B

Part Number: KLS7-RS21600-B
 RS: ROTARY DIP SWITCH
 Terminal Tions: 2=3x2 3=3x3 4=4x1
 Color: Black
 Handle: 00 - Flat; 03 - 3.0mm; 07 - 7.0mm
 Codes: 10=BCD 10 Position 16=BCD 16 Position
 50=BCD Compl 10 Position 56=BCD Compl 16 Position
 00=Others