

D-SUB Series




KLS1-322 D-SUB Connector

Materials and Finish:


Shell: Steel Material, Tin Finished
Dimples on Plug Only
Connector Insulator: PBT Thermoplastic 30% Glass Filled
UL 94V-0, Black Color
Signal Contact Material: Brass, Full Gold Flash
High Power Contact Material: Brass, 15u" Gold Plated

Electrical Characteristics:

High Power Contact Current Rating: 10, 20 OR 40 AMPS
High Power Contact Current Resistance: 75 OHM Max.
Dielectric Withstanding Voltage: 1000 V AC For 1 Minute
Insulation Resistance: 5000 Megaohms Min.
Temperature Rating: -55°C ~ +125°C

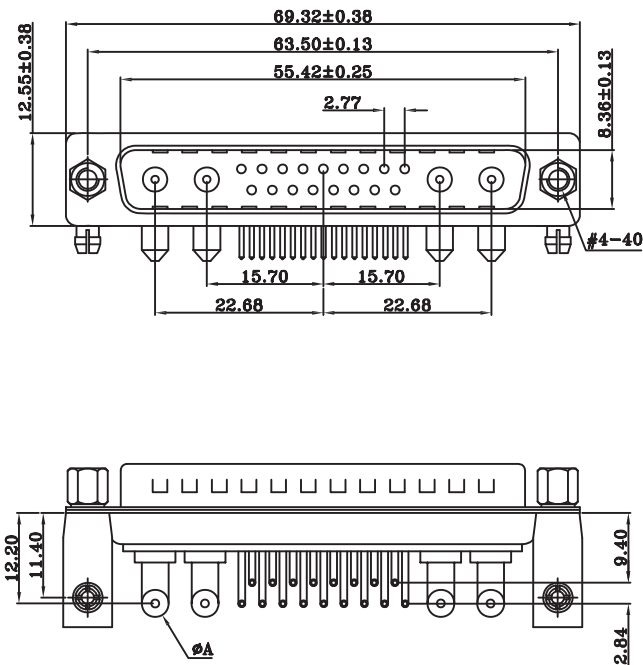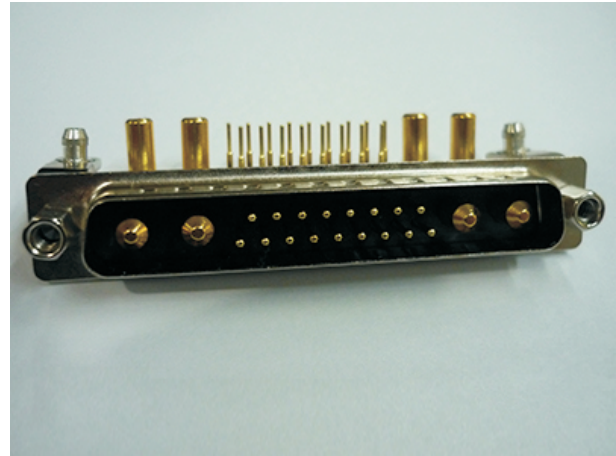

Current Rating	Dimension	
	Ø A	Ø B
40 AMPS	Ø3.75	Ø4.20
30 AMPS	Ø3.2	Ø3.70
20 AMPS	Ø2.8	Ø3.28
10 AMPS	Ø1.7	Ø2.20

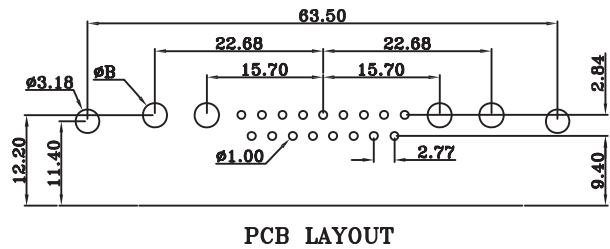

ORDER INFORMATION

Product NO.: KLS1-322-21W4-40A

