
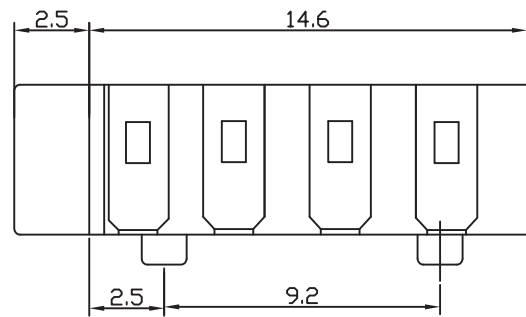


## Phone Jack Series



KLS1-SPJ3.5-013 (Phone Jack)

### Technical parameters:

Rated voltage: DC 30 V  
 Rated current: 0.5 A  
 Contact resistance:  $\leq 0.03\Omega$   
 Insulation resistance:  $\geq 100M\Omega$   
 Withstand voltage: AC500V (50Hz) / 1minute  
 Insertion Force :3-20 N  
 Life: 50000 times  
 Temperature:-30°C ~ 70°C



P. C. B LAYOUT TOP VIEW

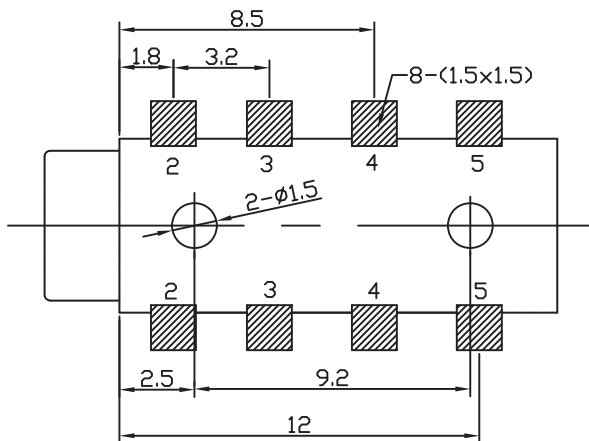

## ORDER INFORMATION

Product NO.: KLS1-SPJ3.5-013

