







CF Cards * SIM Cards * TF Cards * SD



KLS1-SIM-056 Smart Card Acceptor

Technical Characteristics

1. General Characteristics
 Dimensions: 24.00L * 18.75W * 2.65Hmm
 Weight: Appro-0.70±0.1g
 Durability: 5,000 cycles min.
2. Electrical Characteristics
 Contact resistance: 50mΩ typical, 100mΩ max
 Insulation resistance: >1000Ω/500V DC
3. Solderability
 Vapor phase: 215°C, 30sec. Max
 IR reflow: 250°C, 5sec. Max
 Manual soldering: 370°C, 3sec. Max
4. Environmental Characteristics
 Operating temperature: -40°C - +85°C
 Operating humidity: 10% - +95%RH

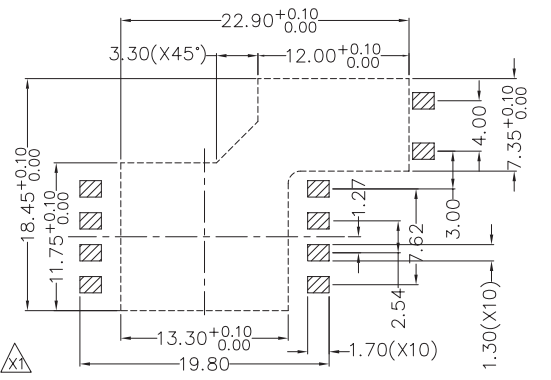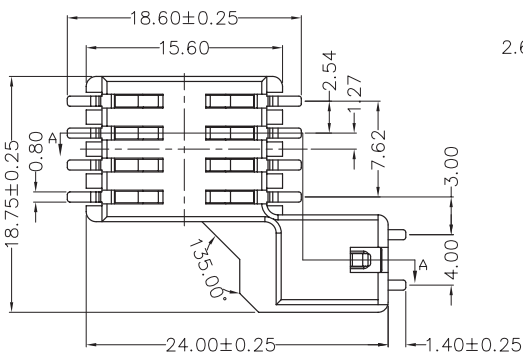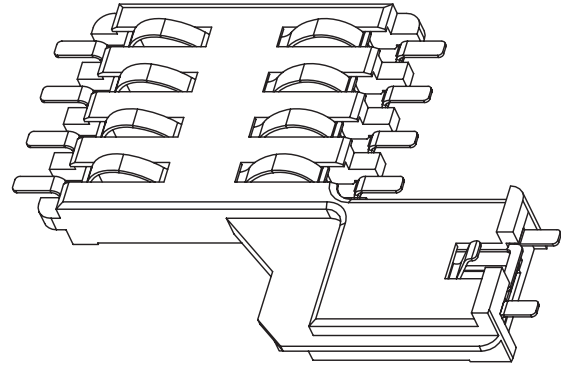

PCB LAYOUT REFERENCE PCB BOARD A(frontispiece)
COMPONENT SIDE(TOLERANCE ±0.05)

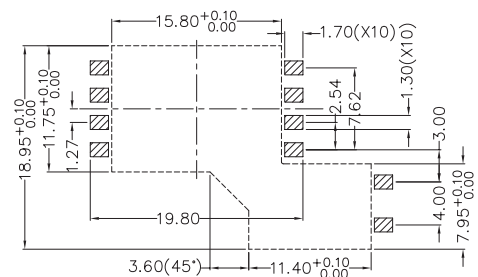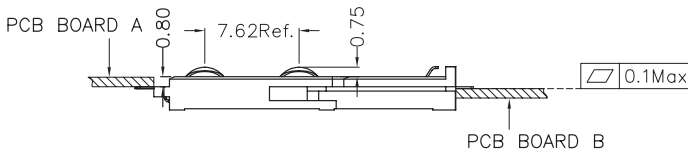

PCB LAYOUT REFERENCE PCB BOARD B(inverse)
COMPONENT SIDE(TOLERANCE ±0.05)

ORDER INFORMATION

Product NO.: KLS1-SIM-056-8P

