

XLR CONNECTOR SERIES


KLS1-XLR-P01 Mini XLR Plug&Socket

Electrical Specification:

Rated current / voltage: 3A 250VA
 The contact resistance: 5mΩMax
 Insulation Resistance: 500VDC 1000MΩmin
 The test voltage: 1000 VDC 1Min
 The ambient temperature: -30° C ~ 100° C
 The life of the product: 5000
 Diameter: Φ2 ~ Φ5mm

Material:

Contact material: gold-plated copper
 Insulator material: PA66, of PBT
 Connector Body Material: Metal

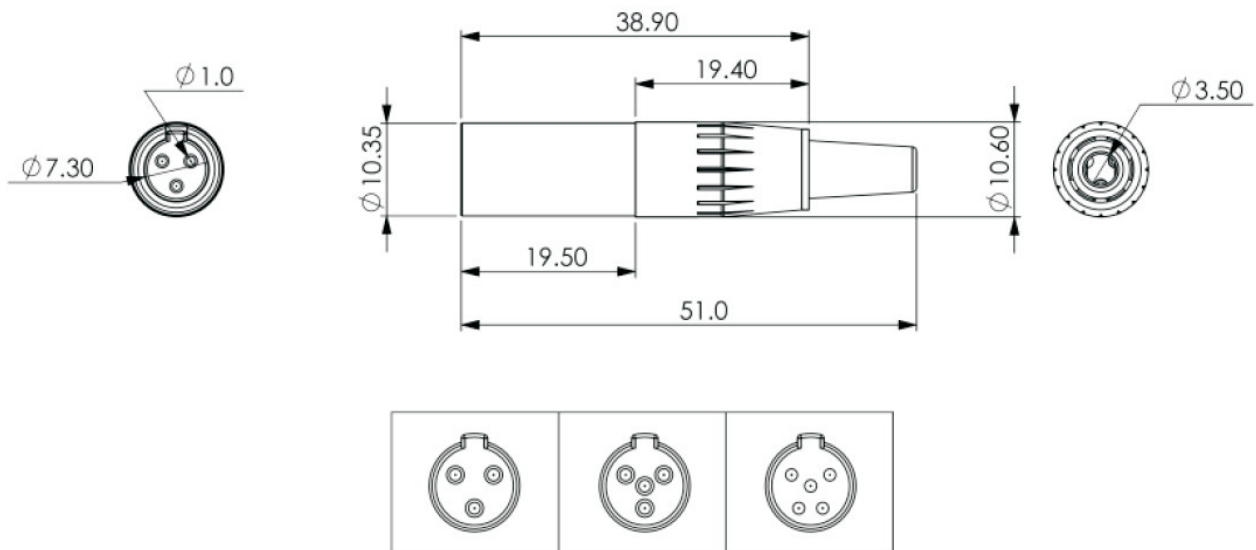

ORDER INFORMATION

Product NO.:KLS1-XLR-P01C-03-M-B

Pos. NO. _____
 XLR Jack series _____
 _____ B=Black,W=White,BR=Brown
 _____ M=Male
 _____ 03=3PIN or 4PIN,5PIN