

ZIF Socket Series

KLS1-108N ZIP Strip Sockets 2.00mm

Specification



Material:
Housing: 30% Glass filled PBT UL 94V-0
Contacts: Phosphor Bronze
Plating: Gold plated: 3u" over 50u" nickel
Tin plated: 100u" over 50u" nickel

Electrical Characteristics:



Current rating: 1AMP.
Insulator resistance: 5000MΩ min, at DC 500V
Contact resistance: 20mΩ max, at DC 100mA
Operating Temperature: -55°C~+105°C

Features:

Lever actuated zero insertion force mechanism
Socket easily disassembles for repair ability

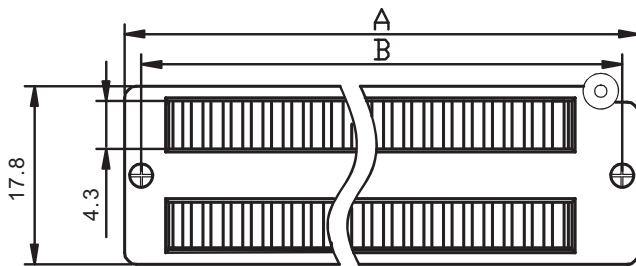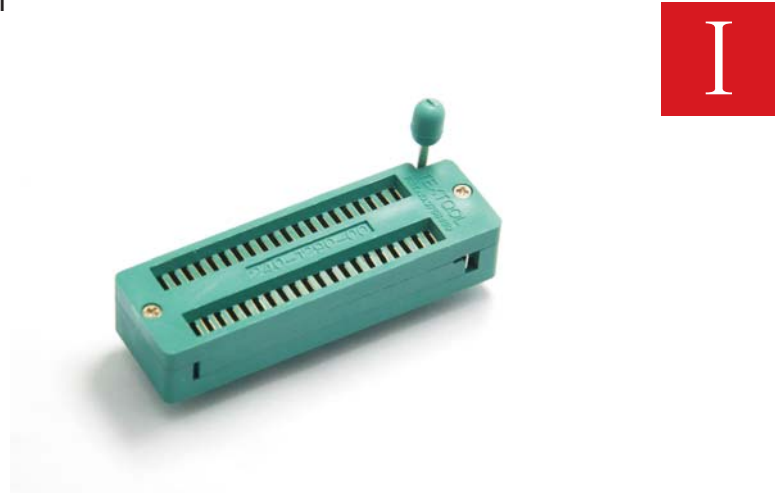

Positions	A	B	C
28	43.0	37.8	26.2
40	54.8	50.7	38.0

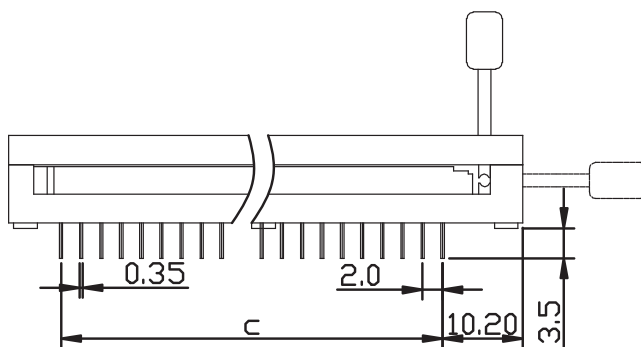

ORDER INFORMATION

Product No.: **KLS1-108N-24**

Pos. No. _____
ZIP Strip Sockets 2.54mm

Number of Contacts: 28-40Pin