

# T1/E1/CEPT/ISDN-PRI Modules


## Electrical Specification:

@25°C Operating Temperature 0 to +70°C

Part NO :		1240K-S009LF
Trun Ratio (±2%) :	TX	1:2CT
	RX	1CT:2
OCL:	TX	1.2mH Min.
	RX	1.2mH Min.
LL :	TX	0.6uH Max.
	RX	0.6uH Max.
Cww :	TX	35pF Max.
	RX	35pF Max.
DCR:	TX	1.0Ω Max.
	RX	1.0Ω Max.
Primary Pins	Transmit	4-5; 9-10; 14-15; 19-20;
	Receive	1-3; 6-8; 11-13; 16-18;
Hi-Pot		1500 Vrms Min.




## Dimension: unit:mm

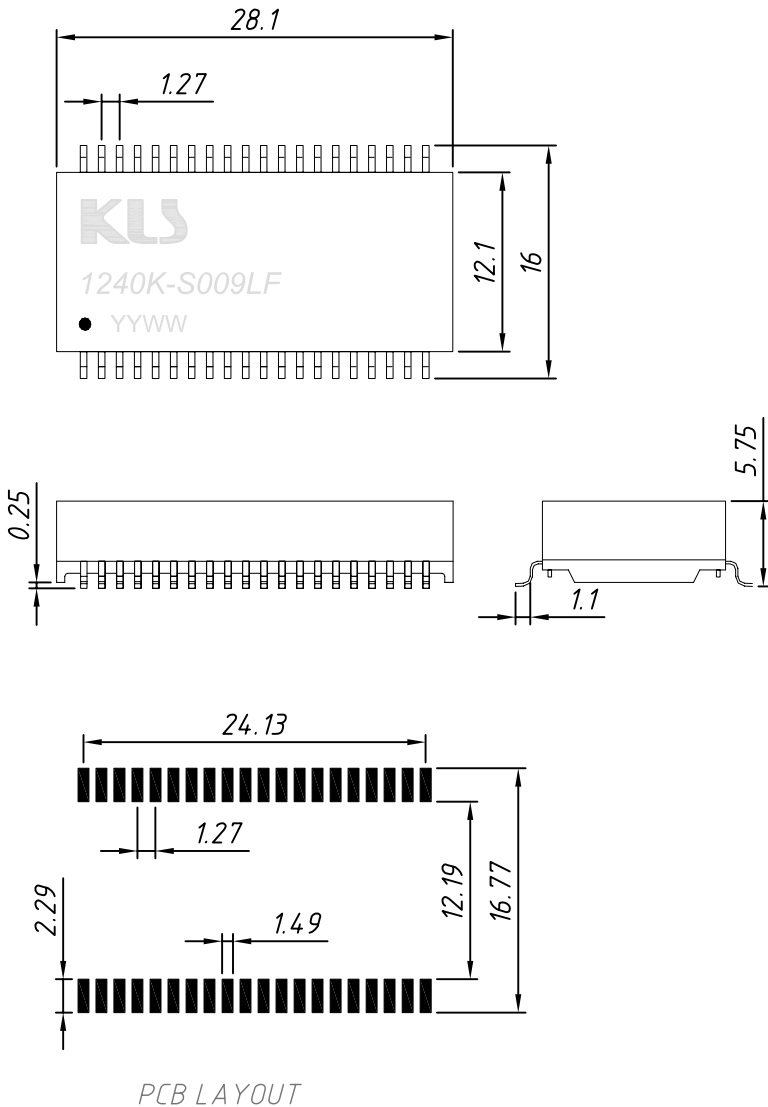

## Features:

1. Designed to meet CCITT & FCC requirements.
2. Peak solder temperature rating per Table 5-2 in IPC/JEDEC J-STD-020C
3. RoHS Compliant

## Schematic

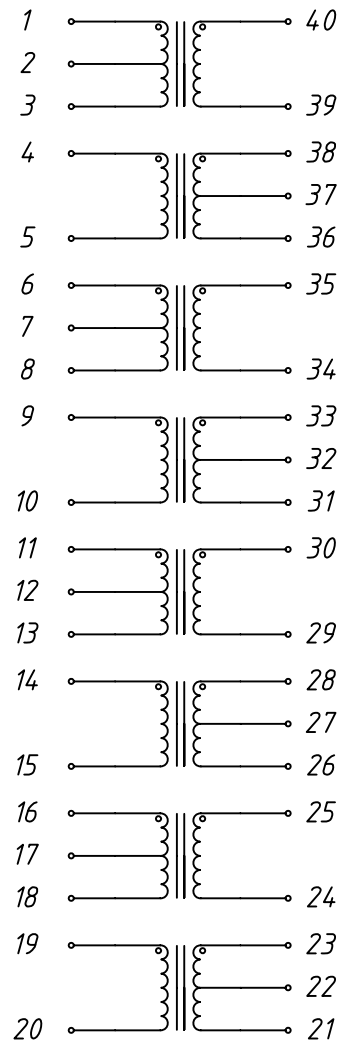

1240K-S009LF-T  
1240K-S009LF-R

Packing: Tube  
Packing: Tape&Reel