


CHI A/R SWR MKR 3: 1.5238 U
 REF 1.000 U 1.000U/ 1.800 000 000.HZ

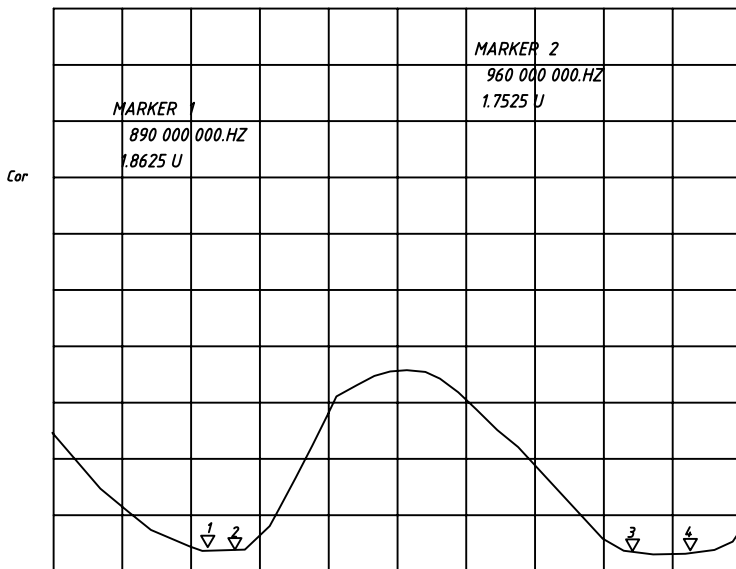

CHI START600 000 000.HZ STOP 2 000 000 000.HZ

Specification:

Frequency : 890-960/1710-1880MHz

Gain : 2dBi

Vswr : 2.0 Max.

Impedance : 50 Ω

Polarization : Vertical

Radiation : OMNIDIRECTIONAL

Max power : 20W

Shell material : PVC

Height : 41±2.0MM

Max Diameter : φ9mm

Min Diameter : φ2.8mm

Connector : SMA Pin

Cable : RG174, Black

Length:200mm

Lightning protection: DC Grounding

Operating Temperature : -30°C to +70°C

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	X. ±5°	UNITS	mm
.X ±0.38	.X ±3°	SHEET SIZE	A4
.XX ±0.25	.XX ±2°	KLS P/N:	ANT-GSM918SMA-CAB/GSM

Draw by: Date 2016-11-11

Check by:: Date 2016-11-11

SCALE SHEET OF

KLS ELECTRONIC CO., LTD.