



Specification:
 Frequency : 824 ~ 960 / 1710 ~ 2170 MHz
 Gain : 2dBi
 VSWR : 2.0 Max.
 Impedance : 50 Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Max power : 10W
 Connector : RP SMA-J
 Cable: RG174, Black
 Length: 3000mm
 Mounting Method: Screw
 Lightning protection: DC Grounding
 Operating Temperature : -30°C to +70°C

Order Information

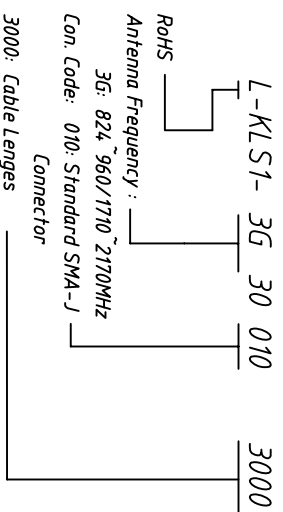

CHI	A/R SWR	1.000U	MKR 4: 1.3252 U	2 170 000 000.000
	REF 1000 U		1.000U/	2 170 000 000.000
	MARKER 4			
	2 170 000 000.000			
	1.3252 U			

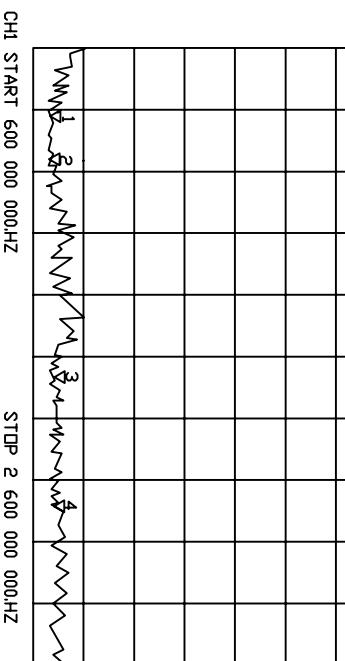

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	X. ±5°	UNITS	3G Antenna With Magnet
.X ±0.38	.X ±3°	SHEET SIZE	
.XX ±0.25	.XX ±2°	KLSP/N:	KLST-3G30010XXXX
Draw by: Date	2016-11-11	KLS ELECTRONIC CO., LTD.	
Check by: Date	2016-11-11		
SCALE	SHEET	OF	