


Specification:

- Antenna
- Center Frequency: 1575.42±1MHz
- Band Width: CF±5MHz
- Polarization: RHCP
- Gain: 5dBic (Zenith)
- V.S.W.R: <1.5
- Impedance: 50Ω

LAN

- Gain: 4±2dB
- Noise Figure: <1.3
- Filter Insertion Loss: <3dB
- Ex-band Attenuation: 12dB@CF+50MHz/16dB@CF-50MHz
- Supply Voltage: 3~5V DC
- Current Consumption: 18~35mA
- V.S.W.R: <2.0
- Cable: RG58
- Connector: N-J or others
- Radome Material: ABS
- Mounting Method: Screw
- Environmental: Operating Temperature: -40℃~+85℃

Order Information

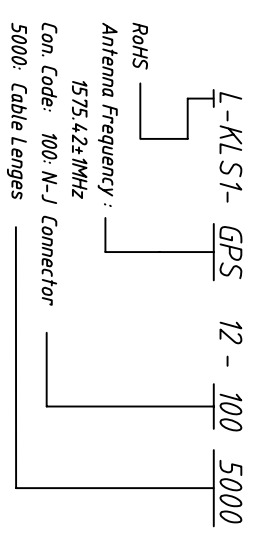

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X.	±0.60	X.	±5°	UNITS	MM	
.X	±0.38	.X	±3°	SHEET SIZE	A4	GPS Active Antenna
.XX	±0.25	.XX	±2°	KLS P/N:	KLS1-GPS12-XXXXXX	
Draw by: Date		2016-11-11				
Check by: Date		2016-11-11				
SCALE		SHEET		OF		

KLS ELECTRONIC CO., LTD.