


CH1 A/R/SWR MNR 1.15050 U
 REF:1000 U 1.000U / 868 000 000.HZ

Cor

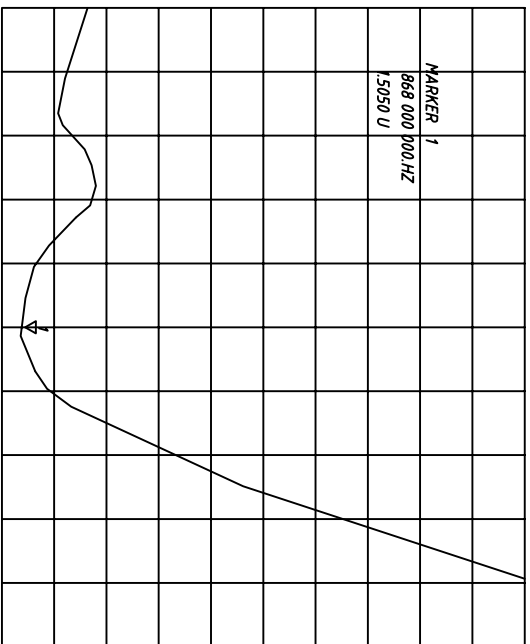

CH1 START: 700 000 000.HZ STOP: 1 000 000 000.HZ

Specification:
 Frequency : 868±20MHZ
 Gain : 3DBI
 VSWR : 2.0 Max.
 Impedance : 50 Ω
 Polarization : Vertical
 Radiation : OMNIDIRECTIONAL
 Connector: SMA-K
 Cable: RG178
 Lightning protection: DC Grounding
 Operating Temperature : -30°C to +70°C

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X.	±0.60	X.	±5°	UNITS	⊕	⊖	
.X	±0.38	.X	±3°	SHEET SIZE	MM	A4	868 Antenna
.XX	±0.25	.XX	±2°	KLSP/N:			KLST-86801XXX
Draw by: Date				2016-11-11			
Check by: Date				2016-11-11			
SCALE				SHEET OF			
KLS ELECTRONIC CO., LTD.							