

SFP*XFP*QSFP/QSFP+ Connectors

KLS1-SFP-04

Electrical Specifications:



- 1.VOLTAGE RATING:30 VAC;
- 2.CURRENT RATING: 0.5 A;
- 3.CONTACT RESISTANCE:30 MILLIOHMS MAX;
- 4.DIELECTRIC WITHSTANDING VOLTAGE:300 VDC MIN;
- 5.INSULATION RESISTANCE:1000 MEGAOHMS MIN
AT 100 VDC FOR 1 MINUTE.

MATERIAL:


- 1.HOUSING: LCP UL94V-0 COLOR BALCK;
- 2.CONTACT: PHOSPHOR BRONZE T=0.20MM;
CONTACT PLATING: GOLD PLATING ON CONTACT AREA,
OVER NICKEL UNDERPLATING OVERALL;
- 3.ROHS COMPLIANCE;
- 4.DURABILITY: 100 CYCLES MIN.

ENVIRONMENTAL:

- 1.OPERATION TEMPERATURE RANGE:-40°C TO +85°C.
- 2.STORAGE TEMPERATURE RANGE:-40°C TO +85°C.
3. IR REFLOW PEAK SOLDERING TEMPERATURE: 255°C 10 SECONDS.
4. RoHS COMPLIANT.

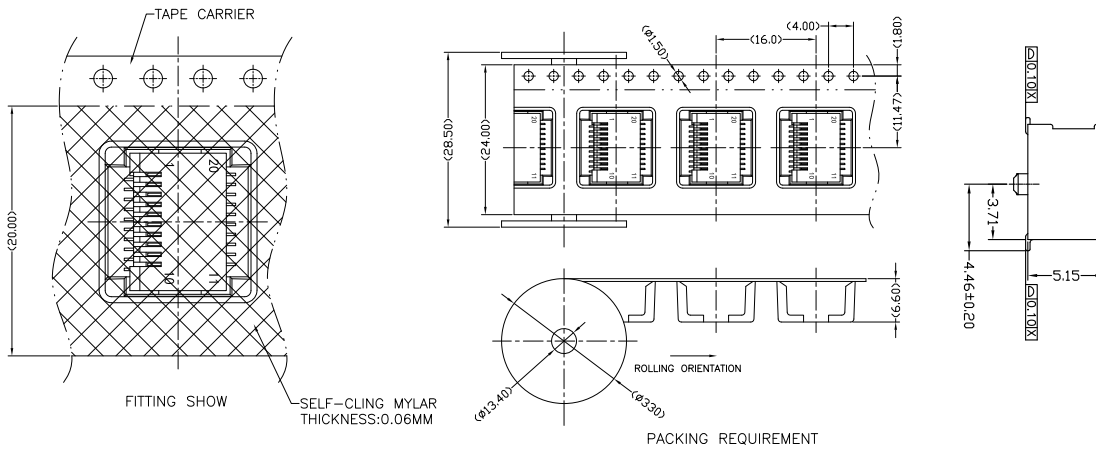

PACKING QUANTITY: 500PCS PER REEL.

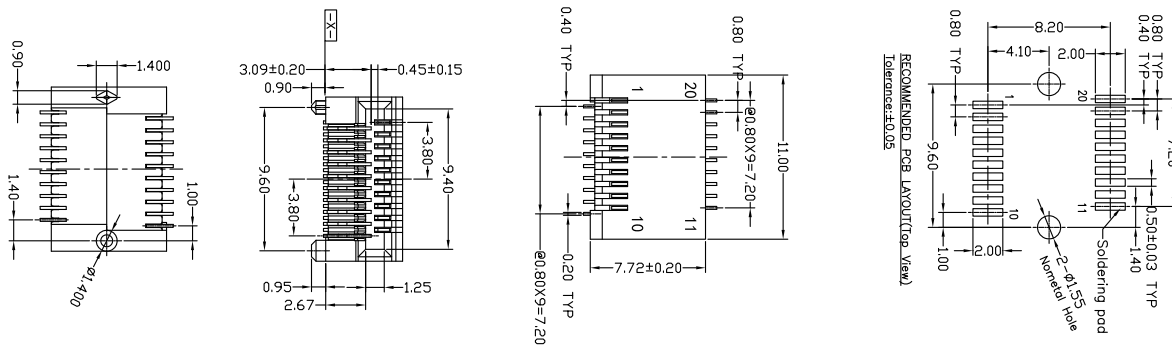

ORDER INFORMATION

KLS1-SFP-04

Part Number