




- Note
- 1-100% Testes No Short or Break Circuit
 - 2-Storage condition:
Temp: 15°C ~ 25°C
Humidity: 30 ~ 60RH%
 - 3-Conductor : 0.05x0.8mm
 - 4-Supporting Tapc: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-1.25-XXP-LXXX A 4/8

- L: RoHS
- 1.25: Pitch 1.25mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- A: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	⊕	⊖	UNITS	mm
.X ±0.38	.X ±3°	SHEET SIZE	A4	PITCH	1.25mm FFC Cable A Type
.XX ±0.25	.XX ±2°	KLS P/N:	KLS17-FFC-125-XXP-LXXXA4/8		
Draw by: Date		KLS ELECTRONIC CO., LTD.			
Check by: Date					
SCALE	SHEET				

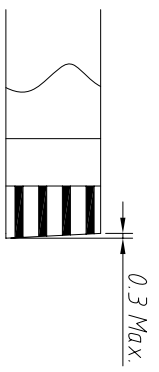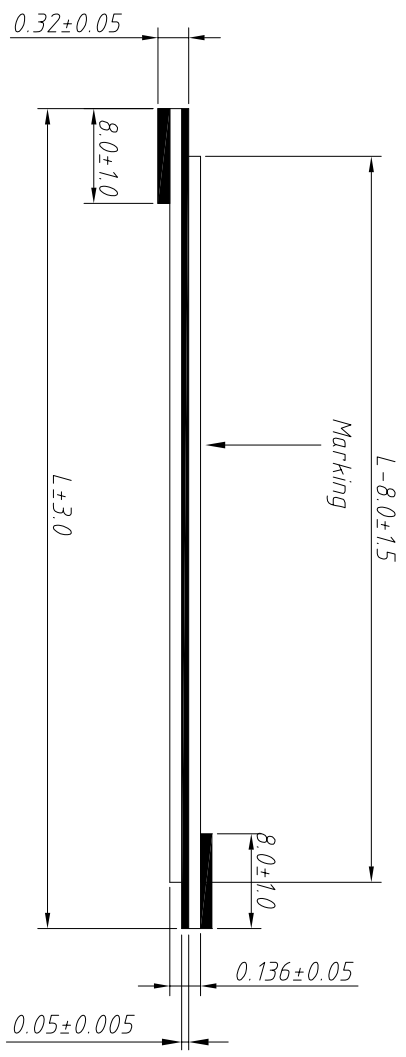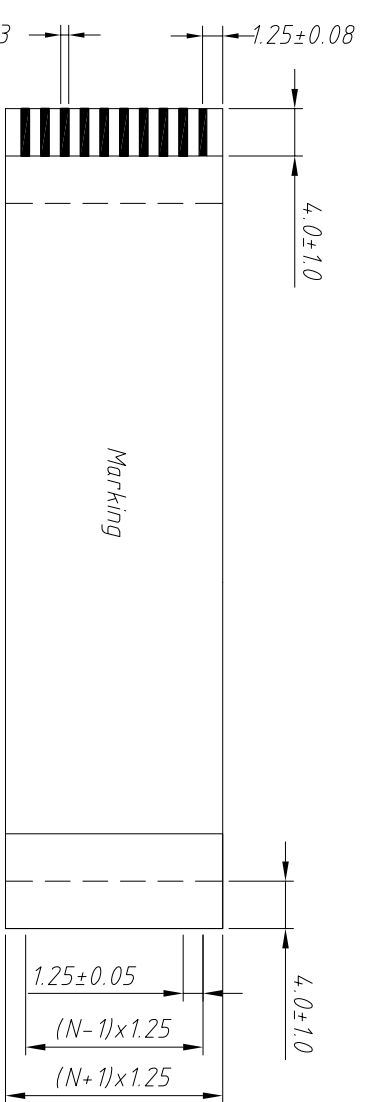


- Note
- 1-100% Testes No Short or Break Circuit
 - 2-Storage condition:
Temp: 15°C ~ 25°C
Humidity: 30 ~ 60RH%
 - 3-Conductor : 0.05x0.8mm
 - 4-Supporting Tapc: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White


Order Information

L-KLS17-FFC-1.25-XXP-LXXX B 4/8


- L: RoHS
- 1.25: Pitch 1.25mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- B: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	⊕	⊖	UNITS	Description: Pitch 1.25mm FFC Cable B Type
X: ±0.38	X: ±3°	mm	A4	SHEET SIZE	
XX: ±0.25	XX: ±2°	KLS P/N:		KLS17-FFC-1.25-XXP-LXXXB4/8	
Draw by: Date		<p>KLS ELECTRONIC CO., LTD.</p>			
Check by: Date					
SCALE	SHEET				

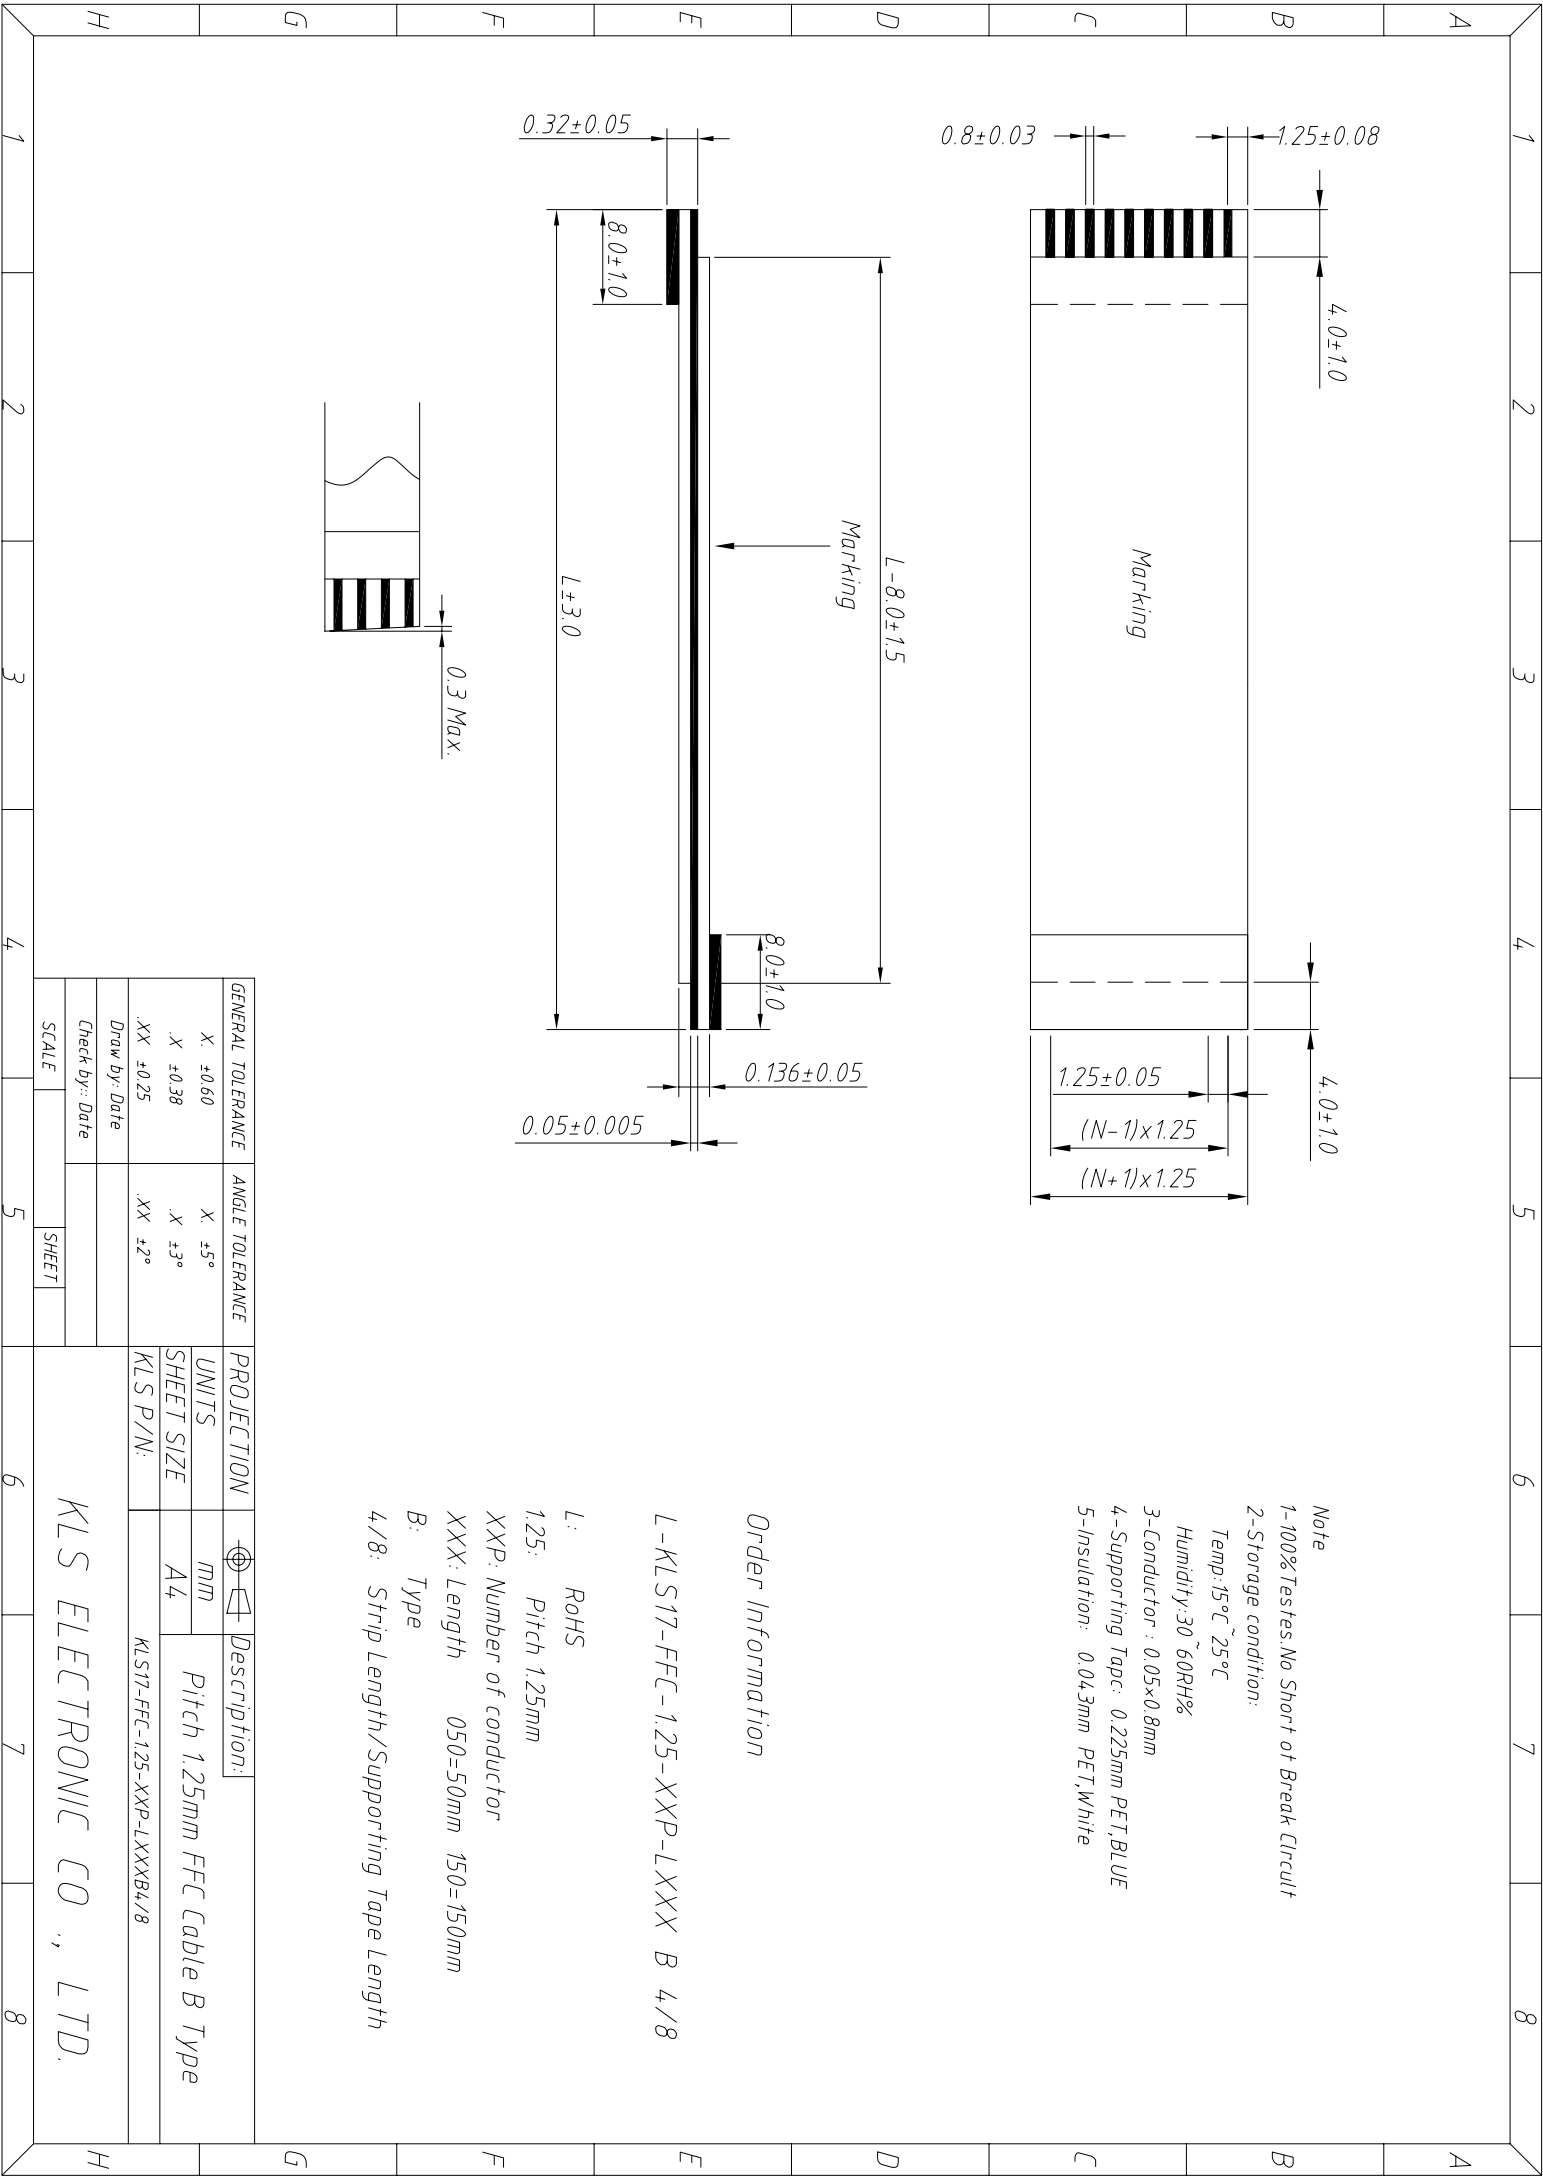

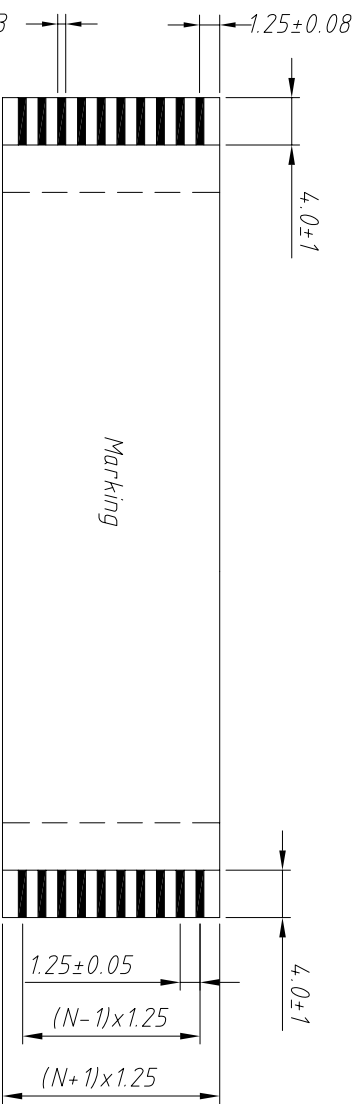


- Note
- 1-100% Testes No Short or Break Circuit
 - 2-Storage condition:
Temp: 15°C ~ 25°C
Humidity: 30 ~ 60RH%
 - 3-Conductor : 0.05x0.8mm
 - 4-Supporting Tape: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

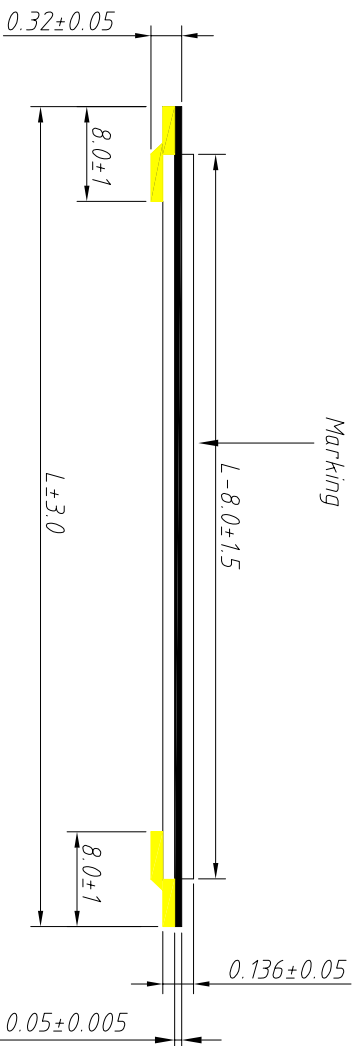




Order Information

L-KLS17-FFC-1.25-XXP-LXXX C 4/8

- L: RoHS
- 1.25: Pitch 1.25mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- C: Type
- 4/8: Strip Length/Supporting Tape Length

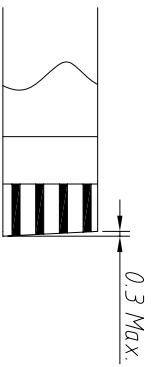

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X: ±0.60	X: ±5°	⊕	⊖	UNITS	mm
X: ±0.38	X: ±3°	SHEET SIZE	A4	Description:	Pitch 1.25mm FFC Cable C Type
XX: ±0.25	XX: ±2°	KLS P/N:	KLS17-FFC-125-XXP-LXXXC4/8		
Draw by: Date		KLS ELECTRONIC CO., LTD.			
Check by: Date					
SCALE		SHEET			

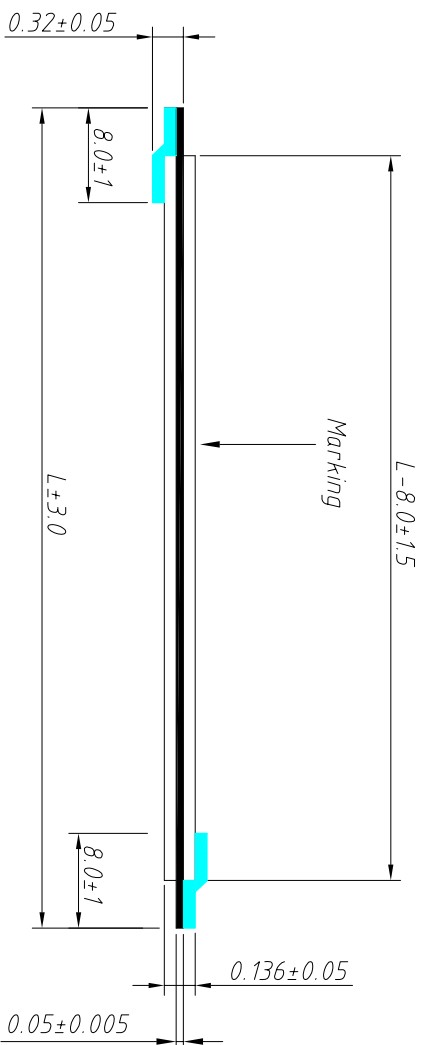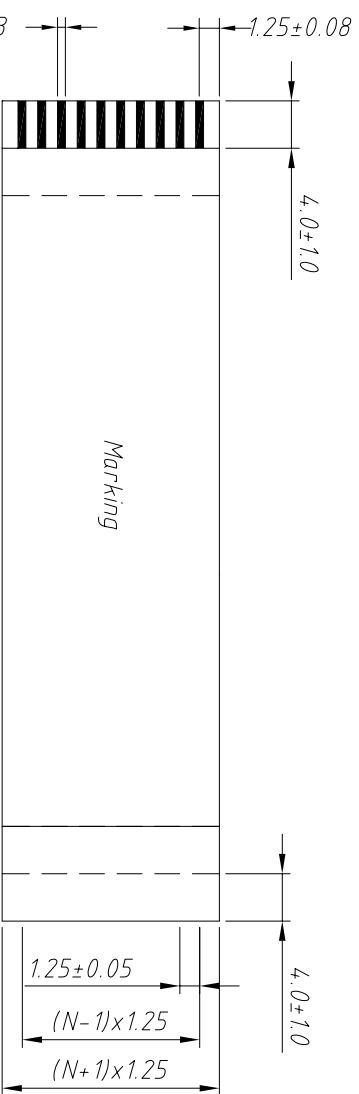

- Note
- 1-100% Testes.No Short at Break Circuit
 - 2-Storage condition:
Temp:15°C~25°C
Humidity:30~60RH%
 - 3-Conductor : 0.05x0.8mm
 - 4-Supporting Tape: 0.225mm PET,BLUE
 - 5-Insulation: 0.043mm PET,White

Order Information

L-KLS17-FFC-1.25-XXP-LXXX D 4/8

- L: RoHS
- 1.25: Pitch 1.25mm
- XXP: Number of conductor
- XXX: Length 050=50mm 150=150mm
- D: Type
- 4/8: Strip Length/Supporting Tape Length

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:		
X: ±0.60	X: ±5°	⊕	▽	UNITS	mm	Pitch 1.25mm FFC Cable D Type		
.X ±0.38	.X ±3°	SHEET SIZE	A4	KLS P/N:	KLS17-FFC-1.25-XXP-LXXXD4/8			
.XX ±0.25	.XX ±2°	SCALE						
Draw by: Date		Check by: Date		KLS ELECTRONIC CO., LTD.				
SCALE		SHEET						