


SECTION A-A

Material
 Screw: M2.5, Steel,Zn plated
 Shrapnel: Stainless steel, Nickel plated
 Pin header: Brass , Tin plated
 Housing: PA66 , UL94V-0

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 26~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C±5 °C for 5S
 Torque: 0.4 N.m (3.54Lb. in)
 Strip length: 6 ~ 7 mm

Order Information

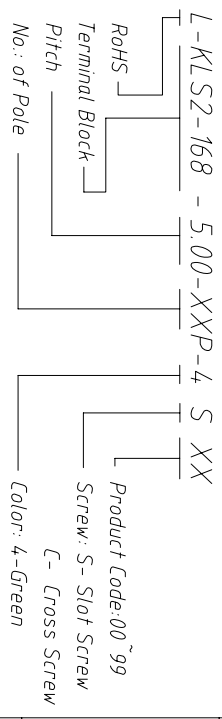

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNITS	SHEET SIZE	
XX ±0.25		XX ±2°		mm	A4	Screw CONN TERM BLOCK 5.00MM
					KLS P/N:	
Draw By: Date		2015-09-01		KLS2-168-5.00-XXP-4S		
Check By: Date		2015-09-15				
SCALE		SHEET		OF		

KLS ELECTRONIC CO., LTD.

PCB LAYOUT