


SECTION A-A

Material
 Nut: M2.5, Brass
 Pin header: Brass, Tin plated
 Housing: LCP, UL94V-0, Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +130 °C
 Soldering: 285 °C ±5 °C for 10S

Order Information

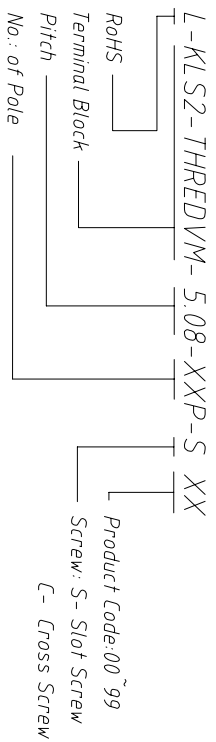

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	X: ±0.38	X: ±5°	X: ±3°	UNITS	SHEET SIZE	
XX ±0.25		XX ±2°		mm	A4	Through hole reflow 5.08mm KLS2-THREDVM-5.08-XXP-S
Draw By: Date	2015-09-01					
Check By: Date	2015-09-15					
SCALE		SHEET		OF		

KLS ELECTRONIC CO., LTD.

