


Material
 Shrapnel: Stainless steel
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Electrical
 Rated voltage: 150V
 Rated current: 2A
 Wire range: 26~18AWG 1.0mm²
 Contact Resistance: 20 mΩ


Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC1300V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C±5 °C for 5S
 Strip length: 9~10 mm

Order Information

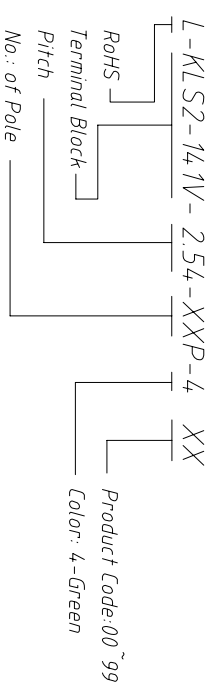

SECTION A-A

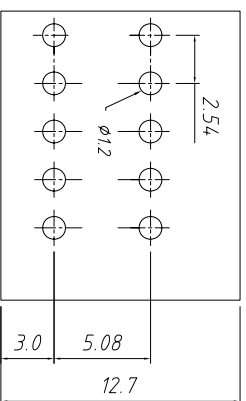

PCB LAYOUT

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
Draw by: Date		2015-09-01		UNITS		Spring Clamp Terminal Block 2.54mm
Check by: Date		2015-09-15		SHEET SIZE		
SCALE		SHEET		OF		KLS ELECTRONIC CO., LTD.

