


PCB LAYOUT

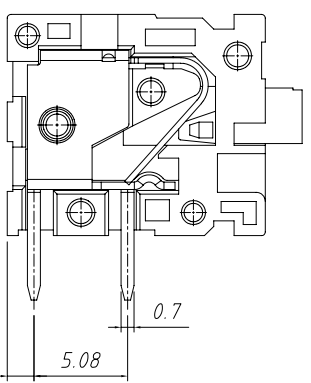


SECTION A-A

**Material**  
 Shrapnel: Stainless steel  
 Pin header: Brass, Tin plated  
 Housing: PA66, UL94V-0

**Electrical**  
 Rated voltage: 150V  
 Rated current: 5A  
 Wire range: 26~18AWG 1.0mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC1300V / 1 min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250°C ±5°C for 5S  
 Strip length: 9~10 mm

Order Information

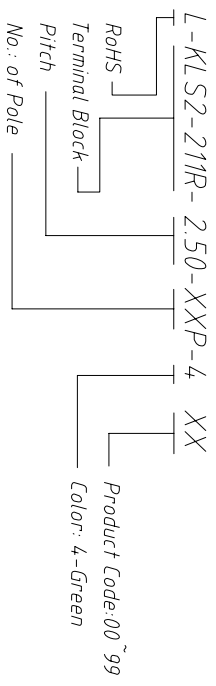

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60	X. ±0.38	XX ±0.25	X. ±5°	X. ±3°	XX ±2°	
Draw By: Date	2015-09-01	SHEET		OF	Spring Clamp Terminal Block 2.50mm	
Check By: Date	2015-09-15	SHEET		OF	KLS2-211R-2.50-XXP	
SCALE		SHEET		OF	KLS ELECTRONIC CO., LTD.	