


PCB LAYOUT

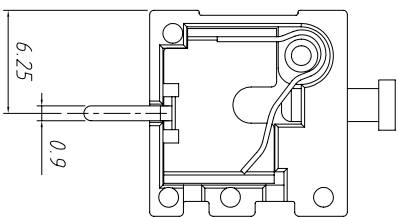


SECTION A-A

Material
 Shrapnel: Stainless steel
 Pin header: Brass, Tin plated
 Housing: PA66, UL94V-0

Electrical
 Rated voltage: 300V
 Rated current: 8A
 Wire range: 26~18AWG 1.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC1300V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C ± 5 °C for 5S
 Strip length: 8~9 mm

Order Information

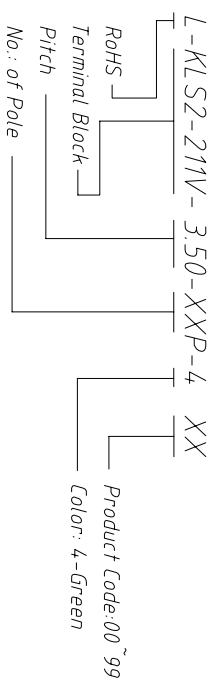

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X. ±0.60	X. ±0.38	X. ±5°	X. ±3°	UNITS	mm	
XX ±0.25	XX ±2°	SHEET SIZE	A4	Spring Clamp Terminal Block 3.50mm		
Draw by: Date	2015-09-01	KLS P/N:	KLS2-211V-3.50-XXP			
Check by: Date	2015-09-15	KLS ELECTRONIC CO., LTD.				
SCALE	SHEET					

