


Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel

Electrical

Rated voltage: 300V
 Rated current: 10A
 Wire range: 26 ~ 14AWG 15mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min
Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C ± 5 °C for SS
 Strip length: 5 ~ 6 mm

Order Information

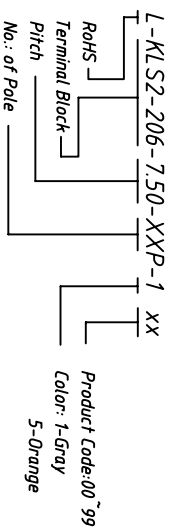

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	UNITS	SHEET SIZE	SCALE
X. ±0.60	X. ±5°	.XX ±2°	mm	A4	
X ±0.38	.X ±3°				
XX ±0.25					
Draw by 2015-09-01	PROJECTION				
Check by 2015-09-15	UNITS				
	SHEET SIZE				
	SCALE				

Description: Spring Clamp Terminal Block 7.50mm

KLS P/N: KLS2-206-7.50-XXP-1

KLS ELECTRONIC CO., LTD.