



PCB LAYOUT

Material
 Housing: PA66, UL94V-0
 Pin header: Brass, Tin plated
 Wire guard: Stainless steel


Electrical
 Rated voltage: 300V
 Rated current: 10A
 Wire range: 26~14AWG 1.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1 min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Soldering: 250 °C±5 °C for 5S
 Strip length: 5~6mm

Order Information

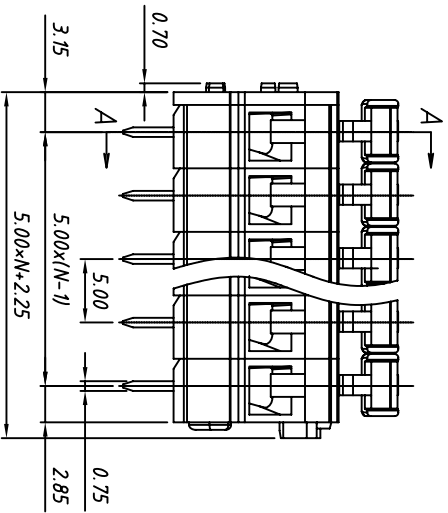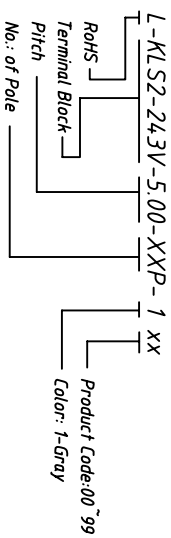

SECTION A-A

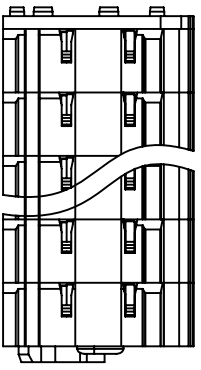

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	SHEET SIZE
X. ±0.60	X. ±5°	.XX ±2°	A4
X ±0.38	.X ±3°		
XX ±0.25			
Draw by 2015-09-01	UNITS	mm	
Check by 2015-09-15			
SCALE			

Description:
 Spring Clamp Terminal Block 5.00mm

KLS P/N: KLS2-243V-5.00-XXP-1

KLS ELECTRONIC CO., LTD.