


**Material**  
 Housing: PA66, UL94V-0  
 Pin header: Brass, Tin plated  
 Wire guard: Stainless steel

**Electrical**  
 Rated voltage: 300V  
 Rated current: 10A

Wire range: 26~14AWG 2.5mm<sup>2</sup>  
 Contact Resistance: 20 mΩ  
 Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1 min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Soldering: 250 °C±5 °C for 5S  
 Strip length: 8~9mm

**Order Information**

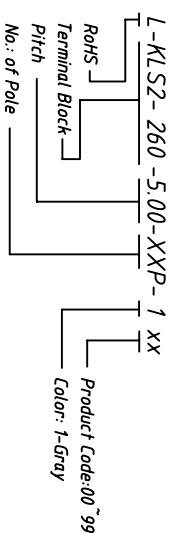

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X. ±0.60		X. ±5°		XX ±2°	
X ±0.38		.X ±3°		mm	
XX ±0.25				mm	
Draw by 2015-09-01		Check by 2015-09-15		SHEET SIZE A4	
SCALE		SHEET SIZE		A4	

Description: Spring Clamp Terminal Block 5.00mm

KLS P/N: KLS2-260-5.00-XXP-1

KLS ELECTRONIC CO., LTD.