


Material
Housing: PA66, UL94V-0
Pin header: Brass, Tin plated
Wire guard: Stainless steel

Electrical
Rated voltage: 300V
Rated current: 10A
Wire range: 26~14AWG 2.5mm²
Contact Resistance: 20 mΩ
Insulation resistance: 500MΩ/DC500V
Withstand voltage: AC2000V / 1 min

Mechanical
Temp. Range: -40 °C ~ +105 °C
Soldering: 250 °C±5 °C for 5S
Strip length: 5~6mm

Order Information

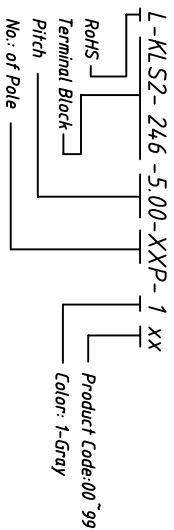

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X. ±0.60	X. ±0.60	X. ±5°	X. ±5°	⊕	⊖
X ±0.38	X ±0.38	X ±3°	X ±3°	⊕	⊖
XX ±0.25	XX ±0.25	XX ±2°	XX ±2°	⊕	⊖
Draw by 2015-09-01	Check by 2015-09-15	UNITS	mm	SHEET SIZE	A4
SCALE					
Description:			Spring Clamp Terminal Block 5.00mm		
KLS P/N:		KLS2-246-5.00-XXP-1			
KLS ELECTRONIC CO., LTD.					