


Panel Mounting  
hole diameter

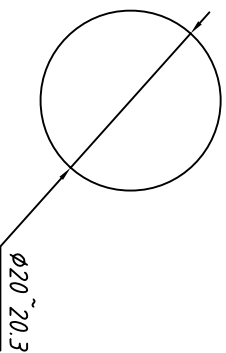

**Material**  
Nylon PA6 UL94V-2

**Material:**  
NBR, EPDM

**Sealing:**  
IP67

**IP rating:**  
IP67

**Cable Range >|0|<:**  
6 ~ 11mm

**Outer diameter of thread:**  
19.7mm


**Thread length:**  
9mm

**Wrench diameter:**  
27mm

**Temp. Range:**  
-40 ° C ~ + 100 ° C

**breathable valve Range:**  
16L/H

*Order Information*

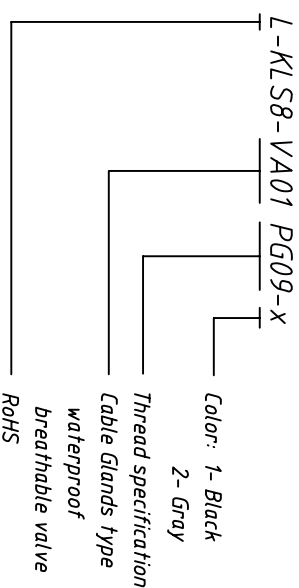

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION	
X. ±0.60	X. ±5°	⊕	mm	A4	
X ±0.38	.X ±3°	⊖	mm	A4	
XX ±0.25	.XX ±2°	⊕	mm	A4	
Draw 2018-01-20	Check 2018-01-20	SCALE			

Description: M20x1.5 waterproof breathable valve

KLS P/N: KLS8-VA01M20-x

KLS ELECTRONIC CO.,LTD.