



Panel Mounting  
hole diameter

**Material**  
 Nut and Body Material: PC  
 Film: EPTFE  
 Sealing: NBR, EPDM  
 IP rating: IP67  
 Thread: M12×1.5  
 Panel Mounting:  $\phi 12$  or M12×1.5  
 Temp. Range:  $-40^{\circ}\text{C}$  ~  $+110^{\circ}\text{C}$   
 breathable valve Range: 3500ml/minute Max.  
 Maximum torque: 8kgf.cm Max.

**Order Information**

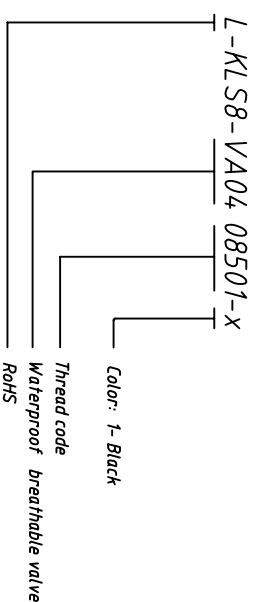

GENERAL TOLERANCE		ANGLE TOLERANCE		Description:	
X. $\pm 0.60$	X. $\pm 5^{\circ}$	$\phi 6.4$ mm waterproof breathable valve KLS P/N: KLS8-VA0408501-X  Ningbo KLS ELECTRONIC CO.,LTD.			
X. $\pm 0.38$	.X. $\pm 3^{\circ}$				
XX. $\pm 0.25$	.XX. $\pm 2^{\circ}$				
Draw	2018-01-20	PROJECTION	UNITS	SHEET SIZE	SCALE
Check	2018-01-20		mm	A4	