
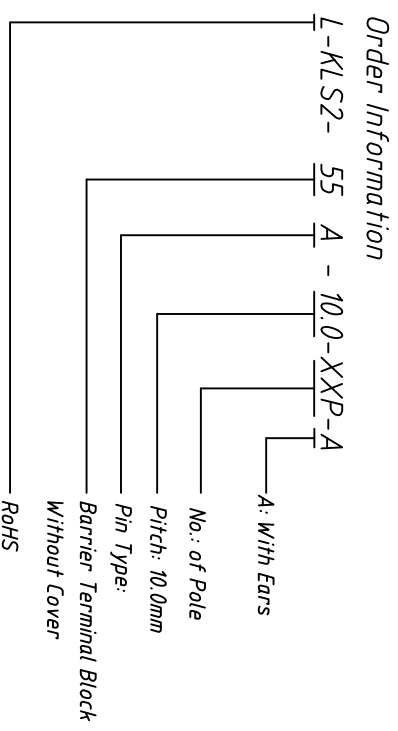


**Material**  
 Screw: M4.0, Steel, Ni Plated  
 Pin header: Brass, 0.8t, Tin Plated  
 Housing: PA66, UL94V-0,Black

**Electrical**  
 Rated voltage: 300V  
 Rated current: 20A  
 Wire range: 22~12AWG 4.0mm<sup>2</sup>  
 Contact Resistance: 20 mΩ

Insulation resistance: 500MΩ/DC500V  
 Withstand voltage: AC2000V / 1min

**Mechanical**  
 Temp. Range: -40 °C ~ +105 °C  
 Torque: 1.2Nm (10.6lb.in)

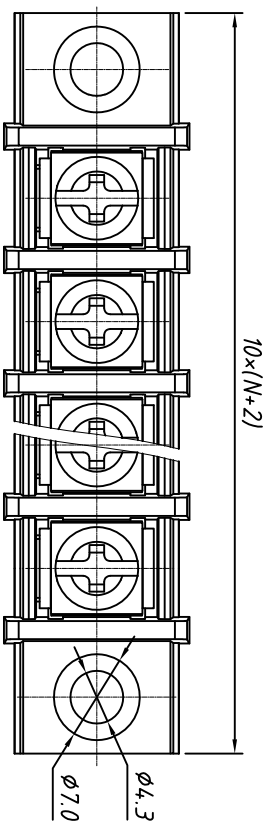

**Order Information**

L-KLS2-55 A - 10.0-XXP-A

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X. ±0.60	X. ±5°	UNITS	
.X ±0.38	.X ±3°	SHEET SIZE	Barrier TERM BLOCK 10.0MM
.XX ±0.25	.XX ±2°	mm	
		A4	
		KLS P/N:	KLS2-55A-10.0-XXP-A

Draw by: Date	2018-02-26
Check by: Date	2018-02-26
SCALE	SHEET OF

**KLS** NingBo KLS ELECTRONIC CO., LTD.