

Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical


Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical

Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2Nm (10.6lb.in)

Order Information

L-KLS2- 55 B - 10.0-XXP-B

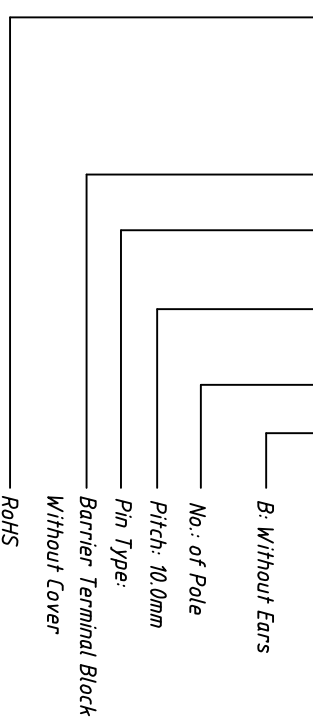

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
Draw by: Date		2018-02-26		UNITS		Barrier TERM BLOCK 10.0MM
Check by: Date		2018-02-26		mm		
SCALE		SHEET		SHEET SIZE		KLS P/N: KLS2-55B-10.0-XXP-B
		OF		A4		



Ningbo KLS ELECTRONIC CO., LTD.