


Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2Nm (10.6lb.in)

Order Information

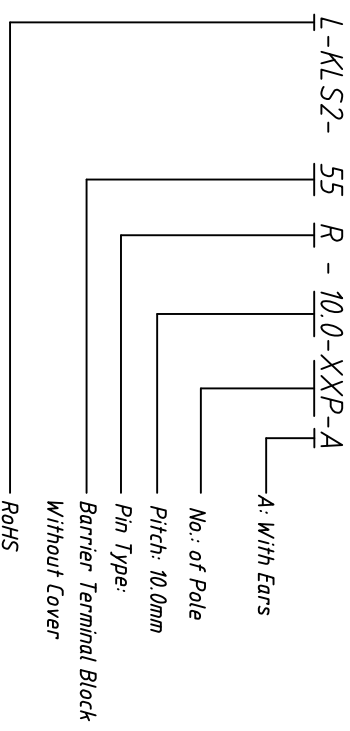

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:
X: ±0.60	.X ±0.38	.XX ±0.25	X: ±5°	.X ±3°	.XX ±2°	
Draw by: Date	2018-02-26	Check by: Date	2018-02-26	UNITS	mm	Barrier TERM BLOCK 10.0MM
SCALE	SHEET	OF	SHEET	SHEET SIZE	A4	
KLS NingBo KLS ELECTRONIC CO., LTD.			KLS P/N: KLS2-55R-10.0-XXP-A			