

Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8t, Tin Plated
 Housing: PA66, UL94V-0,Black


Electrical
 Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4.0mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2Nm (10.6lb.in)

SECTION A-A

Order Information

L-KLS2- 65 C - 11.0-XXP-A

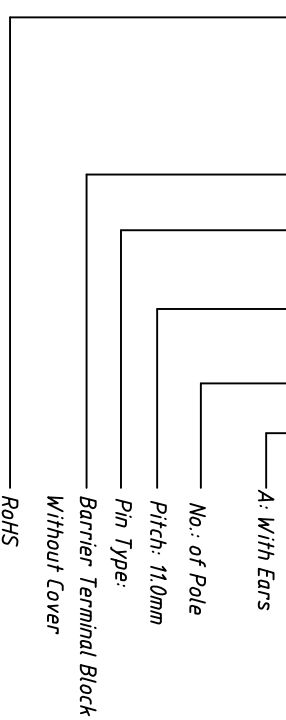

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X: ±0.60		X: ±5°		UNITS	mm	Barrier TERM BLOCK 11.0MM	
.X ±0.38		.X ±3°		SHEET SIZE	A4		
.XX ±0.25		.XX ±2°		KLS P/N:	KLS2-65C-11.0-XXP-A		
Draw by: Date		2018-02-26		NingBo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2018-02-26					
SCALE	SHEET	OF					

