


Material
 Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

Order Information

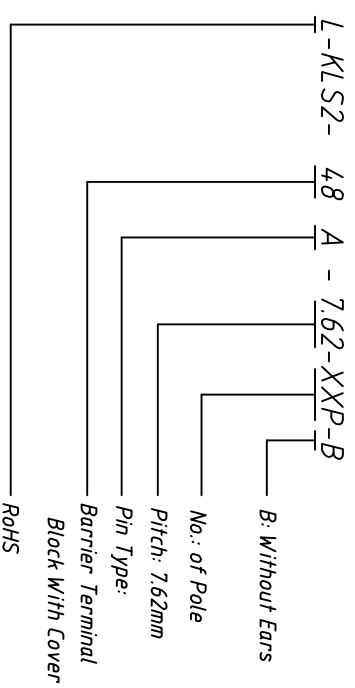

| GENERAL TOLERANCE | | ANGLE TOLERANCE | | PROJECTION | | Description: |
|---|------------|-----------------|------------|------------|---------|--|
| X: ±0.60 | .X ±0.38 | .XX ±0.25 | X: ±5° | .X ±3° | .XX ±2° | |
| Draw by: Date | 2015-09-01 | Check by: Date | 2015-09-15 | SHEET | OF | KLS NingBo KLS ELECTRONIC CO.,LTD. |
| SCALE | | | | | | |
| Barrier TERM BLOCK 7.62MM KLS P/N: KLS2-48A-7.62-XXP-B | | | | | | |