


Material
 Screw: M3.0, Steel, Ni Plated
 Pin header: Brass, 0.8T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 15A
 Wire range: 22~14AWG 2.5mm²
 Contact Resistance: 20 mΩ


Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 0.5Nm (4.5Lb.in)

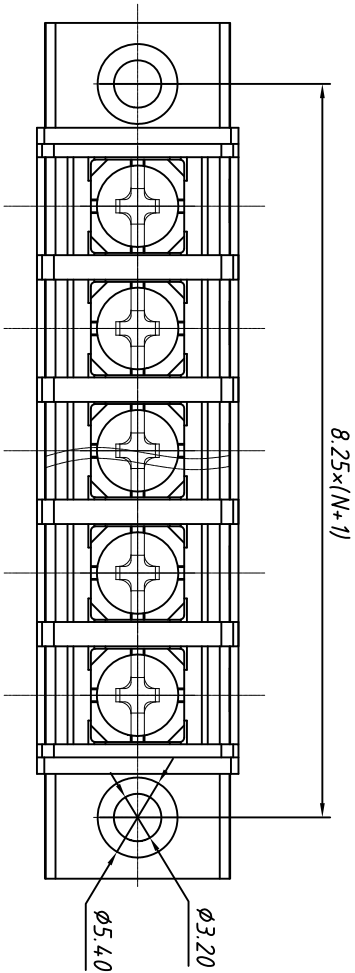

Order Information

L-KLS2-48 C-8.25-XXP-A

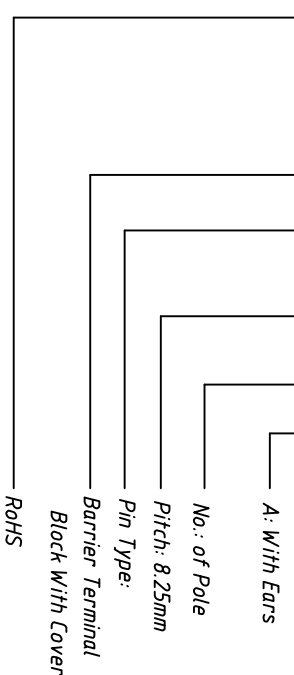

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X. ±0.60		X. ±5°		UNITS	mm	Barrier TERM BLOCK 8.25MM	
.X ±0.38		.X ±3°		SHEET SIZE	A4		
.XX ±0.25		.XX ±2°		KLS P/N:	KLS2-48C-8.25-XXP-A		
Draw by: Date		2015-09-01		KLS Ningbo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2015-09-15					
SCALE	SHEET	OF					

