

SECTION A-A



Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 0.8T, Tin Plated
 Housing: PA66, UL94V-0,Black

Electrical
 Rated voltage: 300V
 Rated current: 20A
 Wire range: 22~12AWG 4mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

L-KLS2-48 C-9.50-XXP-A

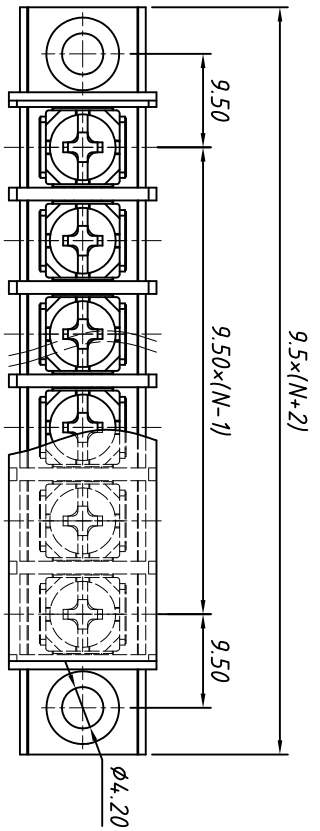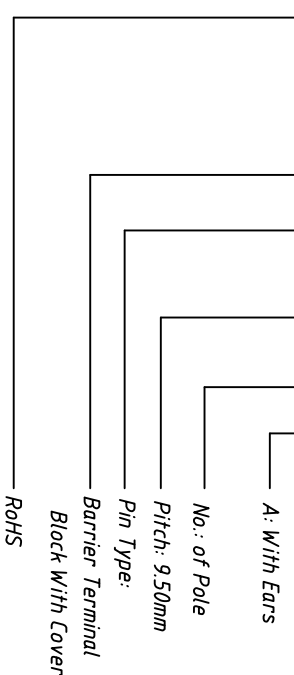

GENERAL TOLERANCE	ANGLE TOLERANCE	PROJECTION	Description:
X: ±0.60	X: ±5°	UNITS	
.X ±0.38	.X ±3°	SHEET SIZE	Barrier TERM BLOCK 9.50MM
.XX ±0.25	.XX ±2°	mm	
		A4	
		KLS P/N:	KLS2-48C-9.50-XXP-A

Draw by: Date	2015-09-01
Check by: Date	2015-09-15
SCALE	SHEET OF

KLS NingBo KLS ELECTRONIC CO.,LTD.