


Material
 Screw: M4.0, Steel, Ni Plated
 Pin header: Brass, 1.0T, Tin Plated
 Housing: PA66, UL94V-0,Black


Electrical
 Rated voltage: 600V
 Rated current: 40A
 Wire range: 18~10AWG 6mm²
 Contact Resistance: 20 mΩ
 Insulation resistance: 500MΩ/DC500V
 Withstand voltage: AC2000V / 1min

Mechanical
 Temp. Range: -40 °C ~ +105 °C
 Torque: 1.2 Nm (10.6 Lb. In)

Order Information

L-KLS2-48 R-13.0-XXP-B

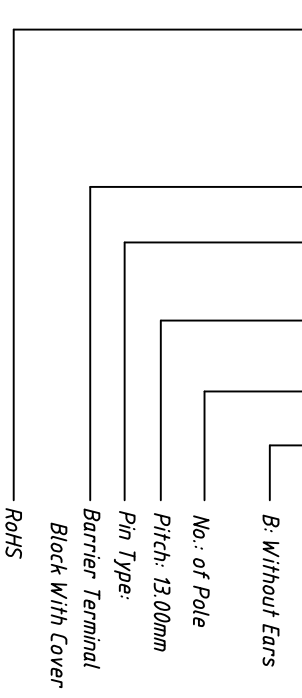

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		Description:	
X.	±0.60	X.	±5°	UNITS	mm	Barrier TERM BLOCK 13.0MM KLS2-48R-13.0-XXP-B	
.X	±0.38	.X	±3°	SHEET SIZE	A4		
.XX	±0.25	.XX	±2°	KLS P/N:			
Draw by: Date		2015-09-01		 NingBo KLS ELECTRONIC CO.,LTD.			
Check by: Date		2015-09-15					
SCALE		SHEET	OF				